

Symantec Trust Network (STN) Certificate Policy

Version 2.8.5

Effective Date: September 8, 2011



Symantec Corporation
350 Ellis Street
Mountain View, CA 94043 USA
+1 650.527.8000
<http://www.symantec.com>

Symantec Trust Network (STN) Certificate Policy

© 2011 Symantec, Corporation. All rights reserved.
Printed in the United States of America.

Published date: September 8, 2011

Important – Acquisition Notice

On August 9, 2010, Symantec Corporation completed the acquisition of VeriSign Inc's Authentication division. As a result Symantec is now the registered owner of this Certificate Policy document and the PKI Services described within this document.

However a hybrid of references to both "VeriSign" and "Symantec" shall be evident within this document for a period of time until it is operationally practical to complete the re-branding of the Certification Authorities and services. Any references to VeriSign as a corporate entity should be strictly considered to be legacy language that solely reflects the history of ownership.

Trademark Notices

Symantec, the Symantec Logo, and the Checkmark Logo are the registered trademarks of Symantec Corporation or its affiliates in the U.S. and other countries. The VeriSign logo, VeriSign Trust and other related marks are the trademarks or registered marks of VeriSign, Inc. or its affiliates or subsidiaries in the U.S. and other countries and licensed by Symantec Corporation. Other names may be trademarks of their respective owners.

Without limiting the rights reserved above, and except as licensed below, no part of this publication may be reproduced, stored in or introduced into a retrieval system, or transmitted, in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), without prior written permission of Symantec Corporation.

Notwithstanding the above, permission is granted to reproduce and distribute this Symantec STN Certificate Policy on a nonexclusive, royalty-free basis, provided that (i) the foregoing copyright notice and the beginning paragraphs are prominently displayed at the beginning of each copy, and (ii) this document is accurately reproduced in full, complete with attribution of the document to Symantec Corporation.

Requests for any other permission to reproduce this Symantec STN Certificate Policy (as well as requests for copies from Symantec) must be addressed to Symantec Corporation., 350 Ellis Street, Mountain View, CA 94043 USA Attn: Practices Development. Tel: +1 650.527.8000 Fax: +1 650.527.8050 Email: practices@symantec.com.

Table of Contents

1. INTRODUCTION	1		
1.1 OVERVIEW	1	4.2.2 Approval or Rejection of Certificate Applications .	14
1.2 DOCUMENT NAME AND IDENTIFICATION	3	4.2.3 Time to Process Certificate Applications.....	15
1.3 PKI PARTICIPANTS.....	3	4.3 CERTIFICATE ISSUANCE.....	15
1.3.1 Certification Authorities.....	3	4.3.1 CA Actions during Certificate Issuance.....	15
1.3.2 Registration Authorities	4	4.3.2 Notifications to Subscriber by the CA of Issuance of Certificate.....	15
1.3.3 Subscribers	4	4.4 CERTIFICATE ACCEPTANCE.....	15
1.3.4 Relying Parties	4	4.4.1 Conduct Constituting Certificate Acceptance.....	15
1.3.5 Other Participants.....	4	4.4.2 Publication of the Certificate by the CA.....	15
1.4 CERTIFICATE USAGE	5	4.4.3 Notification of Certificate Issuance by the CA to Other Entities	15
1.4.1 Appropriate Certificate Usages.....	5	4.5 KEY PAIR AND CERTIFICATE USAGE	16
1.4.2 Prohibited Certificate Uses.....	6	4.5.1 Subscriber Private Key and Certificate Usage	16
1.5 POLICY ADMINISTRATION	6	4.5.2 Relying Party Public Key and Certificate Usage ..	16
1.5.1 Organization Administering the Document	6	4.6 CERTIFICATE RENEWAL.....	16
1.5.2 Contact Person.....	6	4.6.1 Circumstances for Certificate Renewal	17
1.5.3 Person Determining CP Suitability for the Policy...	7	4.6.2 Who May Request Renewal.....	17
1.5.4 CP Approval Procedure.....	7	4.6.3 Processing Certificate Renewal Requests	17
1.6 DEFINITIONS AND ACRONYMS.....	7	4.6.4 Notification of New Certificate Issuance to Subscriber	17
2. PUBLICATION AND REPOSITORY RESPONSIBILITIES. 7		4.6.5 Conduct Constituting Acceptance of a Renewal Certificate.....	17
2.1 REPOSITORIES.....	7	4.6.6 Publication of the Renewal Certificate by the CA.	17
2.2 PUBLICATION OF CERTIFICATE INFORMATION	7	4.6.7 Notification of Certificate Issuance by the CA to Other Entities	17
2.3 TIME OR FREQUENCY OF PUBLICATION	8	4.7 CERTIFICATE RE-KEY	18
2.4 ACCESS CONTROLS ON REPOSITORIES	8	4.7.1 Circumstances for Certificate Re-Key.....	18
3. IDENTIFICATION AND AUTHENTICATION..... 8		4.7.2 Who May Request Certification of a New Public Key	18
3.1 NAMING	8	4.7.3 Processing Certificate Re-Keying Requests	18
3.1.1 Type of Names.....	8	4.7.4 Notification of New Certificate Issuance to Subscriber	18
3.1.2 Need for Names to be Meaningful.....	8	4.7.5 Conduct Constituting Acceptance of a Re-Keyed Certificate.....	18
3.1.3 Anonymity or Pseudonymity of Subscribers	9	4.7.6 Publication of the Re-Keyed Certificate by the CA	18
3.1.4 Rules for Interpreting Various Name Forms	9	4.7.7 Notification of Certificate Issuance by the CA to Other Entities	19
3.1.5 Uniqueness of Names	9	4.8 CERTIFICATE MODIFICATION	19
3.1.6 Recognition, Authentication, and Role of Trademarks	9	4.8.1 Circumstances for Certificate Modification	19
3.2 INITIAL IDENTITY VALIDATION	9	4.8.2 Who May Request Certificate Modification	19
3.2.1 Method to Prove Possession of Private Key.....	9	4.8.3 Processing Certificate Modification Requests.....	19
3.2.2 Authentication of Organization identity	9	4.8.4 Notification of New Certificate Issuance to Subscriber	19
3.2.3 Authentication of Individual Identity	10	4.8.5 Conduct Constituting Acceptance of Modified Certificate.....	19
3.2.4 Non-Verified Subscriber information.....	11	4.8.6 Publication of the Modified Certificate by the CA .	19
3.2.5 Validation of Authority.....	11	4.8.7 Notification of Certificate Issuance by the CA to Other Entities	19
3.2.6 Criteria for Interoperation.....	11	4.9 CERTIFICATE REVOCATION AND SUSPENSION	19
3.3 IDENTIFICATION AND AUTHENTICATION FOR RE-KEY REQUESTS	12	4.9.1 Circumstances for Revocation	19
3.3.1 Identification and Authentication for Routine Re-key	12	4.9.2 Who Can Request Revocation.....	21
3.3.2 Identification and Authentication for Re-key After Revocation.....	12	4.9.3 Procedure for Revocation Request	21
3.4 IDENTIFICATION AND AUTHENTICATION FOR REVOCATION REQUEST	13	4.9.4 Revocation Request Grace Period.....	21
4. CERTIFICATE LIFE-CYCLE OPERATIONAL REQUIREMENTS	14	4.9.5 Time within Which CA Must Process the Revocation Request	21
4.1 CERTIFICATE APPLICATION.....	14	4.9.6 Revocation Checking Requirements for Relying Parties	21
4.1.1 Who Can Submit a Certificate Application?.....	14	4.9.7 CRL Issuance Frequency.....	22
4.1.2 Enrollment Process and Responsibilities.....	14	4.9.8 Maximum Latency for CRLs.....	22
4.2 CERTIFICATE APPLICATION PROCESSING.....	14	4.9.9 On-Line Revocation/Status Checking Availability	22
4.2.1 Performing Identification and Authentication Functions	14		

4.9.10	On-Line Revocation Checking Requirements ..22	5.7.1	Incident and Compromise Handling Procedures.. 32
4.9.11	Other Forms of Revocation Advertisements Available ..22	5.7.2	Computing Resources, Software, and/or Data Are Corrupted .. 32
4.9.12	Special Requirements regarding Key Compromise ..23	5.7.3	Entity Private Key Compromise Procedures 33
4.9.13	Circumstances for Suspension23	5.7.4	Business Continuity Capabilities After a Disaster 33
4.9.14	Who Can Request Suspension.....23	5.8	CA OR RA TERMINATION..... 33
4.9.15	Procedure for Suspension Request.....23	6. TECHNICAL SECURITY CONTROLS 34	
4.9.16	Limits on Suspension Period23	6.1	KEY PAIR GENERATION AND INSTALLATION..... 34
4.10	CERTIFICATE STATUS SERVICES.....23	6.1.1	Key Pair Generation..... 34
4.10.1	Operational Characteristics23	6.1.2	Private Key Delivery to Subscriber..... 34
4.10.2	Service Availability.....23	6.1.3	Public Key Delivery to Certificate Issuer 34
4.10.3	Optional Features23	6.1.4	CA Public Key Delivery to Relying Parties 35
4.11	END OF SUBSCRIPTION.....23	6.1.5	Key Sizes 35
4.12	KEY ESCROW AND RECOVERY.....23	6.1.6	Public Key Parameters Generation and Quality Checking 35
4.12.1	Key Escrow and Recovery Policy and Practices24	6.1.7	Key Usage Purposes (as per X.509 v3 Key Usage Field) 35
4.12.2	Session Key Encapsulation and Recovery Policy and Practices24	6.2	PRIVATE KEY PROTECTION AND CRYPTOGRAPHIC MODULE ENGINEERING CONTROLS 35
5. FACILITY, MANAGEMENT, AND OPERATIONAL CONTROLS25		6.2.1	Cryptographic Module Standards and Controls ... 35
5.1	PHYSICAL CONTROLS25	6.2.2	Private Key (m out of n) Multi-Person Control..... 36
5.1.1	Site Location and Construction.....25	6.2.3	Private Key Escrow..... 36
5.1.2	Physical Access25	6.2.4	Private Key Backup..... 36
5.1.3	Power and Air Conditioning26	6.2.5	Private Key Archival..... 37
5.1.4	Water Exposures.....26	6.2.6	Private Key Transfer Into or From a Cryptographic Module 37
5.1.5	Fire Prevention and Protection26	6.2.7	Private Key Storage on Cryptographic Module 37
5.1.6	Media Storage26	6.2.8	Method of Activating Private Key 37
5.1.7	Waste Disposal26	6.2.9	Method of Deactivating Private Key 39
5.1.8	Off-Site Backup26	6.2.10	Method of Destroying Private Key..... 39
5.2	PROCEDURAL CONTROLS26	6.2.11	Cryptographic Module Rating..... 39
5.2.1	Trusted Roles26	6.3	OTHER ASPECTS OF KEY PAIR MANAGEMENT 39
5.2.2	Number of Persons Required per Task.....27	6.3.1	Public Key Archival 39
5.2.3	Identification and Authentication for Each Role.....27	6.3.2	Certificate Operational Periods and Key Pair Usage Periods 39
5.2.4	Roles Requiring Separation of Duties27	6.4	ACTIVATION DATA..... 41
5.3	PERSONNEL CONTROLS.....28	6.4.1	Activation Data Generation and Installation 41
5.3.1	Qualifications, Experience, and Clearance Requirements28	6.4.2	Activation Data Protection..... 41
5.3.2	Background Check Procedures.....28	6.4.3	Other Aspects of Activation Data 41
5.3.3	Training Requirements29	6.5	COMPUTER SECURITY CONTROLS 42
5.3.4	Retraining Frequency and Requirements.....29	6.5.1	Specific Computer Security Technical Requirements 42
5.3.5	Job Rotation Frequency and Sequence29	6.5.2	Computer Security Rating..... 42
5.3.6	Sanctions for Unauthorized Actions.....29	6.6	LIFE CYCLE TECHNICAL CONTROLS 43
5.3.7	Independent Contractor Requirements.....29	6.6.1	System Development Controls..... 43
5.3.8	Documentation Supplied to Personnel30	6.6.2	Security Management Controls..... 43
5.4	AUDIT LOGGING PROCEDURES30	6.6.3	Life Cycle Security Controls 43
5.4.1	Types of Events Recorded30	6.7	NETWORK SECURITY CONTROLS..... 43
5.4.2	Frequency of Processing Log.....30	6.8	TIME-STAMPING 43
5.4.3	Retention Period for Audit Log30	7. CERTIFICATE, CRL, AND OCSP PROFILES..... 43	
5.4.4	Protection of Audit Log31	7.1	CERTIFICATE PROFILE..... 43
5.4.5	Audit Log Backup Procedures31	7.1.1	Version Number(s)..... 44
5.4.6	Audit Collection System (Internal vs. External).....31	7.1.2	Certificate Extensions 44
5.4.7	Notification to Event-Causing Subject31	7.1.3	Algorithm Object Identifiers..... 45
5.4.8	Vulnerability Assessments.....31	7.1.4	Name Forms 46
5.5	RECORDS ARCHIVAL31	7.1.5	Name Constraints 46
5.5.1	Types of Records Archived31	7.1.6	Certificate Policy Object Identifier 46
5.5.2	Retention Period for Archive.....31	7.1.7	Usage of Policy Constraints Extension 46
5.5.3	Protection of Archive31	7.1.8	Policy Qualifiers Syntax and Semantics..... 46
5.5.4	Archive Backup Procedures32	7.1.9	Processing Semantics for the Critical Certificate Policies Extension 46
5.5.5	Requirements for Time-Stamping of Records32	7.2	CRL PROFILE 46
5.5.6	Archive Collection System (Internal or External) ..32	7.2.1	Version Number(s)..... 47
5.5.7	Procedures to Obtain and Verify Archive Information32		
5.6	KEY CHANGEOVER32		
5.7	COMPROMISE AND DISASTER RECOVERY32		

7.2.2	CRL and CRL Entry Extensions	47	9.12.3	Circumstances under Which OID Must be Changed	57
7.3	OCSP PROFILE.....	47	9.13	DISPUTE RESOLUTION PROVISIONS	57
7.3.1	Version Number(s).....	47	9.13.1	Disputes among Symantec, Affiliates, and Customers	57
7.3.2	OCSP Extensions.....	47	9.13.2	Disputes with End-User Subscribers or Relying Parties	57
8.	COMPLIANCE AUDIT AND OTHER ASSESSMENTS	47	9.14	GOVERNING LAW	57
8.1	FREQUENCY AND CIRCUMSTANCES OF ASSESSMENT	48	9.15	COMPLIANCE WITH APPLICABLE LAW	58
8.2	IDENTITY/QUALIFICATIONS OF ASSESSOR	48	9.16	MISCELLANEOUS PROVISIONS.....	58
8.3	ASSESSOR'S RELATIONSHIP TO ASSESSED ENTITY	48	9.16.1	Entire Agreement	58
8.4	TOPICS COVERED BY ASSESSMENT	48	9.16.2	Assignment	58
8.5	ACTIONS TAKEN AS A RESULT OF DEFICIENCY	49	9.16.3	Severability.....	58
8.6	COMMUNICATIONS OF RESULTS.....	49	9.16.4	Enforcement (Attorney's Fees and Waiver of Rights)	58
9.	OTHER BUSINESS AND LEGAL MATTERS.....	50	9.16.5	Force Majeure.....	58
9.1	FEES	50	9.17	OTHER PROVISIONS.....	58
9.1.1	Certificate Issuance or Renewal Fees.....	50	APPENDIX A. TABLE OF ACRONYMS AND DEFINITIONS.....	59	
9.1.2	Certificate Access Fees.....	50	TABLE OF ACRONYMS.....	59	
9.1.3	Revocation or Status Information Access Fees.....	50	DEFINITIONS.....	59	
9.1.4	Fees for Other Services.....	50	APPENDIX B.....	63	
9.1.5	Refund Policy	50	HISTORY OF CHANGES	63	
9.2	FINANCIAL RESPONSIBILITY	50			
9.2.1	Insurance Coverage	50			
9.2.2	Other Assets.....	50			
9.2.3	Extended Warranty Coverage	51			
9.3	CONFIDENTIALITY OF BUSINESS INFORMATION	51			
9.3.1	Scope of Confidential Information	51			
9.3.2	Information Not Within the Scope of Confidential Information.....	51			
9.3.3	Responsibility to Protect Confidential Information	51			
9.4	PRIVACY OF PERSONAL INFORMATION	51			
9.4.1	Privacy Plan	51			
9.4.2	Information Treated as Private	52			
9.4.3	Information Not Deemed Private	52			
9.4.4	Responsibility to Protect Private Information.....	52			
9.4.5	Notice and Consent to Use Private Information.....	52			
9.4.6	Disclosure Pursuant to Judicial or Administrative Process	52			
9.4.7	Other Information Disclosure Circumstances	52			
9.5	INTELLECTUAL PROPERTY RIGHTS.....	52			
9.5.1	Property Rights in Certificates and Revocation Information.....	52			
9.5.2	Property Rights in the CP.....	53			
9.5.3	Property Rights in Names.....	53			
9.5.4	Property Rights in Keys and Key Material	53			
9.6	REPRESENTATIONS AND WARRANTIES	53			
9.6.1	CA Representations and Warranties	53			
9.6.2	RA Representations and Warranties	53			
9.6.3	Subscriber Representations and Warranties.....	54			
9.6.4	Relying Party Representations and Warranties.....	54			
9.6.5	Representations and Warranties of Other Participants.....	54			
9.7	DISCLAIMERS OF WARRANTIES	54			
9.8	LIMITATIONS OF LIABILITY.....	54			
9.9	INDEMNITIES	55			
9.9.1	Indemnification by Subscribers.....	55			
9.9.2	Indemnification by Relying Parties	55			
9.10	TERM AND TERMINATION.....	56			
9.10.1	Term	56			
9.10.2	Termination.....	56			
9.10.3	Effect of Termination and Survival.....	56			
9.11	INDIVIDUAL NOTICES AND COMMUNICATIONS WITH PARTICIPANTS.....	56			
9.12	AMENDMENTS.....	56			
9.12.1	Procedure for Amendment.....	56			
9.12.2	Notification Mechanism and Period	56			

1. INTRODUCTION

The Symantec Trust Network (STN) is a global PKI that accommodates a large, public, and widely distributed community of users with diverse needs for communications and information security. Symantec offers STN services together with a global network of affiliates (“Affiliates”) throughout the world.

This document, “Symantec Trust Network Certificate Policies” (CP) is the principal statement of policy governing the STN. The CP sets forth the business, legal, and technical requirements for approving, issuing, managing, using, revoking, and renewing, digital Certificates within the STN and providing associated trust services for all participants within the STN. These requirements protect the security and integrity of the STN and comprise a single set of rules that apply consistently STN-wide, thereby providing assurances of uniform trust throughout the STN. The CP is not a legal agreement between Symantec and STN participants; rather, contractual obligations between Symantec and STN participants are established by means of agreements with such participants.

This document is targeted at:

- STN PKI service providers who have to operate in terms of their own Certification Practices Statement (CPS) that complies with the requirements laid down by the CP
- STN certificate Subscribers who need to understand how they are authenticated and what their obligations are as STN subscribers and how they are protected under the STN
- Relying parties who need to understand how much trust to place in a STN certificate, or a digital signature using that certificate

The CP, however, does not govern any services outside the STN. For example, Symantec and certain Affiliates offer private label services by which organizations create their own private hierarchies outside the STN, approve certificate applications, and outsource to Symantec or an Affiliate the back-end functions of certificate issuance, management, revocation, and renewal. Because the CP applies only to the STN, it does not apply to these private hierarchies.¹

This CP conforms to the Internet Engineering Task Force (IETF) RFC 3647 for Certificate Policy and Certification Practice Statement construction.

1.1 Overview

An overview of the STN structure is shown in Diagram 1 below. At the top of the hierarchy is this CP that sets out the policies under which STN participants must operate.

Symantec and Affiliate Processing Centers operate as CAs under the STN CP, issuing end-user subscriber certificates.

Registration Authorities (RAs) are entities that authenticate certificate requests under the STN. Symantec and Affiliates act as RAs for certificates they issue. Symantec and Affiliates also enter into contractual relationships with Enterprises who wish to manage their own certificate requests. These enterprise customers act as RAs, authenticating certificate requests for themselves and their affiliated individuals. Symantec or the Affiliate will then issue these authenticated certificate requests.

¹ Authenticated Content Signing Certificates (ACS) are issued by a non-STN CA. However, reference is made to these certificates in certain sections of this CP, for ACS customers to understand certain procedural differences used for these certificates

Depending on the class and type of certificate, Digital Certificates may be used by Subscribers to secure websites, digitally sign code or other content, digitally sign documents and/or e-mails. The person who ultimately receives a signed document or communication, or accesses a secured website is referred to as a relying party, i.e., he/she is relying on the certificate and has to make a decision on whether to trust it. A Relying Party must rely on a certificate in terms of the relevant Relying Party Agreement included in the Certificate.

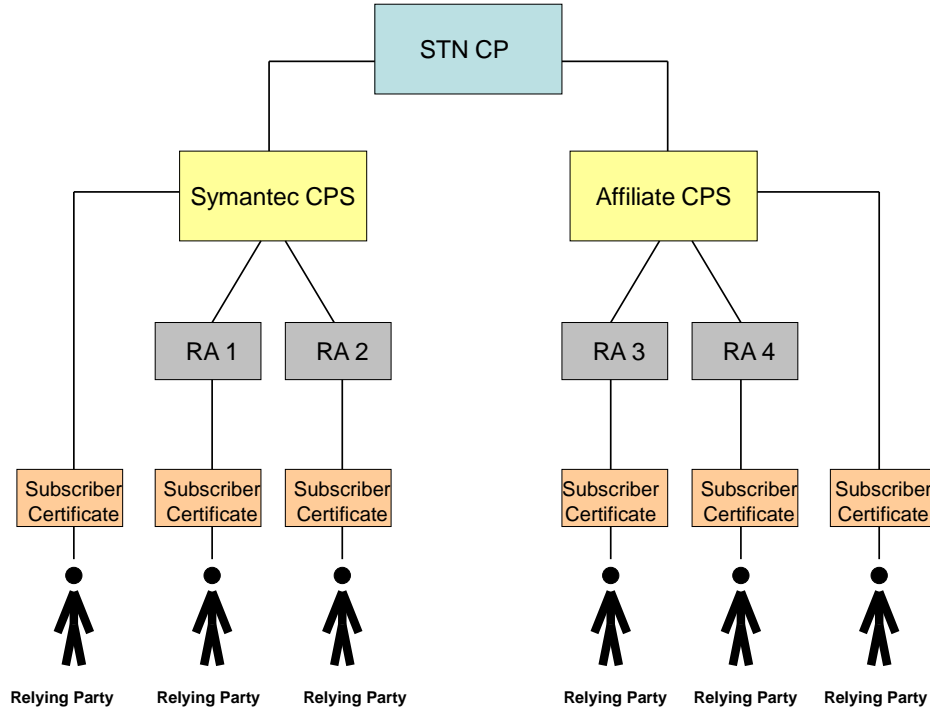


Diagram 1. Structure of the STN

Diagram 2 below provides a summary of the classes of certificates under the STN, to whom they may be issued and their respective assurance levels based on the identification and authentication procedures required for each. This CP describes the identification and authentication performed for each Class of certificate in more detail.

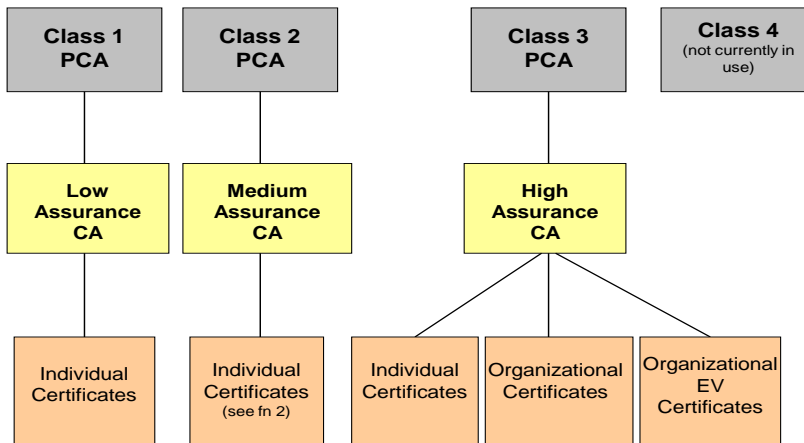


Diagram 2. Classes of STN Certificates

1.2 Document Name and Identification

This document is the Symantec Trust Network (STN) Certificate Policy (CP). Symantec, acting as the policy-defining authority, has assigned an object identifier value extension for each Class of Certificate issued under the Symantec Trust Network (STN). The object identifier values used for the Classes of end-user Subscriber Certificates are²:

- The Class 1 Certificate Policy: Symantec/pki/policies/stn-cp/class1 (2.16.840.1.113733.1.7.23.1).
- The Class 2 Certificate Policy: Symantec/pki/policies/stn-cp/class2 (2.16.840.1.113733.1.7.23.2).
- The Class 3 Certificate Policy: Symantec/pki/policies/stn-cp/class3 (2.16.840.1.113733.1.7.23.3).
- The Class 3 EV Certificate Policy: Symantec/pki/stn-cp/Class3/Enhanced validation (2.16.840.1.113733.1.7.23.6)

Each OID above may be extended further to define additional policies covering a particular type of certificate. The extended OID SHALL be defined in the particular CPS for that product. For example, a Non-Federal SSP certificate issued under the STN at the Basic level has a Class 2 OID defined in the Symantec Non-Federal SSP CPS as follows, 2.16.840.1.113733.1.7.23.2.1.1.

1.3 PKI Participants

1.3.1 Certification Authorities

The term Certification Authority (CA) is an umbrella term that refers to all entities authorized to issue public key certificates within the STN. The CA term encompasses a subcategory of issuers called Primary Certification Authorities (PCA). PCAs act as roots of four domains³, one for each class of Certificate. Each PCA is a Symantec entity. Subordinate to the PCAs are Certification Authorities that issue Certificates to end-user Subscribers or other CAs.

Symantec also operates the “Symantec Universal Root Certification Authority” and the “Symantec ECC Universal Root Certification Authority”. The Universal Root CAs are not defined under a particular certificate Class, and may issue any class of Subordinate CA.

Before a subordinate CA can issue STN Extended Validation Certificates in terms of the Guidelines for Extended Validation Certificates (“Guidelines”), it shall have to meet the requirements of the guidelines.

Symantec enterprise customers may operate their own CAs as a subordinate CA to a STN PCA. Such a customer enters into a contractual relationship with Symantec to abide by all the requirements of the STN CP and the STN CPS. These subordinate CAs may, however implement a more restrictive practices based on their internal requirements.

One STN CA technically outside the three hierarchies under each of the PCAs is the Secure Server Certification Authority. This CA does not have a superior CA, such as a Root or a PCA. Rather, it acts as its own Root and has a self-signed Root Certificate. It also issues Certificates to end-user Subscribers. Thus, the Secure Server Hierarchy consists only of the Secure Server CA. The Secure Server CA issues Secure Server IDs, which are deemed to be Class 3 Organizational Certificates and are functionally equivalent to Certificates issued by a Class 3 CA.

The Secure Server CA employs lifecycle practices that are substantially similar with those of other Class 3 CAs within the STN. Thus, Symantec has approved and designated the Secure Server Certification Authority as a Class 3 CA within the STN. The Certificates it issues are

² Certain certificates issued under the STN may contain legacy policy OIDs assigned under the STN.

³ Class 4 certificates are not currently issued by the STN)

considered to provide assurances of trustworthiness comparable to other Class 3 organizational Certificates.

1.3.2 Registration Authorities

A Registration Authority is an entity that performs identification and authentication of certificate applicants for end-user certificates, initiates or passes along revocation requests for certificates for end-user certificates, and approves applications for renewal or re-keying certificates on behalf of a STN CA. Symantec and affiliates may act as RAs for certificates they issues.

Third parties, who enter into a contractual relationship with Symantec or an affiliate, may operate their own RA and authorize the issuance of certificates by a STN CA. Third party RAs must abide by all the requirements of the STN CP, the relevant CPS and any Enterprise Service Agreement entered into with Symantec. RAs may, however implement a more restrictive practices based on their internal requirements. An example of a third party RA is a customer of Managed PKI services customer.

1.3.3 Subscribers

Subscribers under the STN include all end users (including entities) of certificates issued by a STN CA. A subscriber is the entity named as the end-user Subscriber of a certificate. End-user Subscribers may be individuals, organizations or, infrastructure components such as firewalls, routers, trusted servers or other devices used to secure communications within an Organization.

In some cases certificates are issued directly to individuals or entities for their own use. However, there commonly exist other situations where the party requiring a certificate is different from the subject to whom the credential applies. For example, an organization may require certificates for its employees to allow them to represent the organization in electronic transactions/business. In such situations the entity subscribing for the issuance of certificates (i.e. paying for them, either through subscription to a specific service, or as the issuer itself) is different from the entity which is the subject of the certificate (generally, the holder of the credential). Two different terms are used in this CPS to distinguish between these two roles: "Subscriber", is the entity which contracts with Symantec for the issuance of credentials and "Subject", is the person to whom the credential is bound. The Subscriber bears ultimate responsibility for the use of the credential but the Subject is the individual that is authenticated when the credential is presented.

When 'Subject' is used, it is to indicate a distinction from the Subscriber. When "Subscriber" is used it may mean just the Subscriber as a distinct entity but may also use the term to embrace the two. The context of its use in this CP will invoke the correct understanding.

CAs are technically also subscribers of certificates within the STN, either as a PCA issuing a self signed Certificate to itself, or as a CA issued a Certificate by a superior CA. References to "end entities" and "subscribers" in this CP, however, apply only to end-user Subscribers.

1.3.4 Relying Parties

A Relying Party is an individual or entity that acts in reliance of a certificate and/or a digital signature issued under the STN. A Relying party may, or may not also be a Subscriber within the STN.

1.3.5 Other Participants

An Affiliate is a leading trusted third party, for example in the technology, telecommunications, or financial services industry that has entered into an agreement with Symantec to operate a Certification Authority under the STN within a specific territory.

Processing Centers (i.e., Symantec or certain Affiliates) are entities that create a secure facility housing, among other things, the cryptographic modules used for the issuance of Certificates. Processing Centers act as CAs within the STN and perform all Certificate lifecycle services of issuing, managing, revoking, and renewing Certificates. Affiliates who outsource the backend functionality to Symantec but retain the RA responsibilities are called Service Centers.

1.4 Certificate Usage

1.4.1 Appropriate Certificate Usages

1.4.1.1 Certificates Issued to Individuals

Individual Certificates are normally used by individuals to sign and encrypt e-mail and to authenticate to applications (client authentication). While the most common usages for individual certificates are included in the Table below, an individual certificate may be used for other purposes, provided that a Relying Party is able to reasonably rely on that certificate and the usage is not otherwise prohibited by law, by this CP, by any CPS under which the certificate has been issued and any agreements with Subscribers.

Certificate Class:	Assurance Level			Usage		
	Low assurance level	Medium assurance level	High assurance Level	Signing	Encryption	Client Authentication
Class 1 Certificates	✓			✓	✓	✓
Class 2 Certificates		✓		✓	✓	✓
Class 3 Certificates			✓	✓	✓	✓

Table 1. Individual Certificate Usage

1.4.1.2 Certificates issued to Organizations

Organizational Certificates are issued to organizations after authentication that the Organization legally exists and that other Organization attributes included in the certificate (excluding non-verified subscriber information) are authenticated e.g. ownership of an Internet or e-mail domain. It is not the intent of this CP to limit the types of usages for Organizational Certificates. While the most common usages are included in the Table below, an organizational certificate may be used for other purposes, provided that a Relying Party is able to reasonably rely on that certificate and the usage is not otherwise prohibited by law, by this CP, by any CPS under which the certificate has been issued and any agreements with Subscribers.

Certificate Class:	Assurance Level			Usage			
	High Assurance with Extended Validation	High assurance	Medium assurance	Code/Content Signing	Secure SSL/TLS-sessions	Authen tication	Signing and Encryption
Class 3 Certificates		✓		✓	✓	✓	✓
Class 3 EV Certificates	✓	✓			✓	✓	✓

Table 2. Organizational Certificate Usage⁴

⁴ "In limited circumstances Class 2 certificates may be issued by a Managed MPKI customer to an affiliated organization (and not an individual within the organization). Such certificate may be used for organization authentication and application signing only. Except as expressly authorized by Symantec through an Enterprise Service Agreement imposing

1.4.1.3 Assurance levels

Low assurance certificates are certificates that should not be used for authentication purposes or to support Non-repudiation. The digital signature provides modest assurances that the e-mail originated from a sender with a certain e-mail address. The Certificate, however, provides no proof of the identity of the Subscriber. The encryption application enables a Relying Party to use the Subscriber's Certificate to encrypt messages to the Subscriber, although the sending Relying Party cannot be sure that the recipient is in fact the person named in the Certificate.

Medium assurance certificates are certificates that are suitable for securing some inter- and intra-organizational, commercial, and personal e-mail requiring a medium level of assurances of the Subscriber identity, in relation to Class 1 and 3.

High assurance Certificates are individual and organizational Class 3 Certificates that provide a high level of assurance of the identity of the Subscriber in comparison with Class 1 and 2.

High assurance with extended validation certificates are Class 3 certificates issued by Symantec in conformance with the Guidelines for Extended Validation Certificates.

1.4.2 Prohibited Certificate Uses

Certificates shall be used only to the extent the use is consistent with applicable law, and in particular shall be used only to the extent permitted by applicable export or import laws.

STN Certificates are not designed, intended, or authorized for use or resale as control equipment in hazardous circumstances or for uses requiring fail-safe performance such as the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control systems, or weapons control systems, where failure could lead directly to death, personal injury, or severe environmental damage. Also, Class 1 Certificates shall not be used as proof of identity or as support of non repudiation of identity or authority. Client Certificates are intended for client applications and shall not be used as server or organizational Certificates.

CA Certificates may not be used for any functions except CA functions. In addition, end-user Subscriber Certificates shall not be used as CA Certificates.

1.5 Policy Administration

1.5.1 Organization Administering the Document

Symantec Corporation
350 Ellis Street
Mountain View CA 94043
USA

1.5.2 Contact Person

The Certificate Policy Manager
Symantec Trust Network Policy Management Authority
c/o Symantec Corporation
350 Ellis Street
Mountain View, CA 94043 USA

authentication and practice requirements consistent with the security standards of this CP , Subscribers are prohibited from using this certificate for code and content signing, SSL encryption and S/mime signing and such key usage will be disabled for these certificates."

+1 (650) 527-8000(voice)
+1 (650) 527-8050 (fax)
practices@symantec.com

1.5.3 Person Determining CP Suitability for the Policy

The STN Policy Management Authority PMA determines the suitability and applicability of this CP.

1.5.4 CP Approval Procedure

Approval of this CP and subsequent amendments shall be made by the PMA. Amendments shall either be in the form of a document containing an amended form of the CP or an update notice. Amended versions or updates shall be linked to the Practices Updates and Notices section of the Symantec Repository located at: www.symantec.com/repository/updates. Updates supersede any designated or conflicting provisions of the referenced version of the CP. The PMA shall determine whether changes to the CP require a change in the Certificate policy object identifiers of the Certificate Policies corresponding to each Class of Certificate.

1.6 Definitions and Acronyms

See Appendix A for a table of acronyms and definitions

2. Publication and Repository Responsibilities

2.1 Repositories

Symantec and Affiliate Processing Centers are responsible for maintaining a publicly accessible online repository. Processing Centers, as part of their contracts with Service Centers, publish Certificates in the Service Center's repository based on Certificate Applications approved by the Service Centers or their RAs, as well as revocation information concerning such Certificates.

2.2 Publication of Certificate Information

Symantec and Affiliates maintain a web-based repository that permits Relying Parties to make online inquiries regarding revocation and other Certificate status information. Any exception to this shall be approved by the PMA on a case by case basis and must be documented in the appropriate CPS. A Processing Center, as part of its contract with a Service Center, shall host such a repository on behalf of the Service Center. Symantec and Affiliates provide Relying Parties with information on how to find the appropriate repository to check Certificate status and, if OCSP (Online Certificate Status Protocol) is available, how to find the right OCSP responder.

Processing Centers publish the Certificates they issue on behalf of their own CAs, and the CAs of Service Centers in their Sub-domain. Upon revocation of an end-user Subscriber's Certificate, the Processing Center that issued the Certificate shall publish notice of such revocation in the repository. In addition, Processing Centers shall issue Certificate Revocation Lists (CRLs) and, if available, provide OCSP services (Online Certificate Status Protocol) for their own CAs and the CAs of Service Centers within their respective Sub-domains.

Symantec and Affiliates will at all times publish a current version of:

- This STN CP
- Its CPS,
- Subscriber Agreements,
- Relying Party Agreements

2.3 Time or Frequency of Publication

CA information is published promptly after it is made available to the CA. The STN offers CRLs showing the revocation of STN Certificates and offers status checking services through the Symantec Repository and Affiliates' repositories. CRLs for end-user Subscriber Certificates shall be issued at least once per day. CRLs for CAs that only issue CA Certificates shall be issued at least quarterly, and also whenever a CA Certificate is revoked. CRLs for Authenticated Content Signing (ACS) Root CAs are published annually and also whenever a CA Certificate is revoked. If a Certificate listed in a CRL expires, it may be removed from later issued CRLs after the Certificate's expiration.

2.4 Access Controls on Repositories

Symantec and Affiliates shall not intentionally use technical means of limiting access to this CP, their CPS, Certificates, Certificate status information, or CRLs. Symantec and Affiliates shall, however, require persons to agree to a Relying Party Agreement or CRL Usage Agreement as a condition to accessing Certificates, Certificate status information, or CRLs. Symantec and Affiliates shall implement controls to prevent unauthorized persons from adding, deleting, or modifying repository entries.

3. Identification and Authentication

3.1 Naming

Unless where indicated otherwise in this CP, the relevant CPS or the content of the digital certificate, names appearing in Certificates issued under STN are authenticated.

3.1.1 Type of Names

End-user Subscriber Certificates contain an X.501 Distinguished Name (DN) in the Subject name field.

The Subject DN of end-user Subscriber Certificates includes a common name (CN=) component. The authenticated common name value included in the Subject DN of organizational Certificates shall be a domain name, Organizational e-mail address, the legal name of the organization within the organization, or name of the organizational representative authorized to use the organization's private key. The (O=) component shall be the legal name of the organization.

The common name value included in the Subject DN of individual Certificates shall represent the individual's generally accepted personal name. Common names shall be authenticated in the case of Class 2-3 Certificates⁵. STN Certificates may also contain a reference to the applicable Relying Party Agreement in their DNs.

EV SSL certificate content and profile requirements shall comply with the requirements of the EV guidelines.

3.1.2 Need for Names to be Meaningful

Class 2 and 3 end-user Subscriber Certificates shall include meaningful names in the following sense: Class 2 and 3 end-user Subscriber Certificates shall contain names with commonly

⁵ For certain approved internal uses within Symantec Corporation, Class 2 certificates may be issued without such identity authentication. Such certificates shall contain the Symantec organization name in the DN as well an OU value reflecting the lack of trust in the Subscriber identity. Symantec personnel required to use such certificates shall receive training specific to user responsibilities.

understood semantics permitting the determination of the identity of the individual or organization that is the Subject of the Certificate.

3.1.3 Anonymity or Pseudonymity of Subscribers

The identity of Class 1 individual Subscribers is not authenticated. Class 1 subscribers may use pseudonyms. Class 2 and 3 Subscribers are not permitted to use pseudonyms (names other than a Subscriber's true personal or organizational name).

When required by law or requested by a State or Government authority to protect the identity of certain end user subscribers (e.g., minors, or sensitive government employee information), a certificate may be issued indicating that identity has been authenticated but is protected. Each request for anonymity in a certificate will be evaluated on its merits by the PMA.

3.1.4 Rules for Interpreting Various Name Forms

No stipulation

3.1.5 Uniqueness of Names

The names of Subscribers within the STN shall be unique within an Affiliate's and Customer's Sub-domain for a specific class of Certificate. It is possible for a Subscriber to have two or more certificates with the same Subject Distinguished Name (DN).

3.1.6 Recognition, Authentication, and Role of Trademarks

Certificate Applicants shall not use names in their Certificate Applications that infringe upon the Intellectual Property Rights of others. Neither Symantec nor any Affiliate shall be required to determine whether a Certificate Applicant has Intellectual Property Rights in the name appearing in a Certificate Application or to arbitrate, mediate, or otherwise resolve any dispute concerning the ownership of any domain name, trade name, trademark, or service mark, and Symantec and any Affiliate shall be entitled, without liability to any Certificate Applicant, to reject or suspend any Certificate Application because of such dispute.

3.2 Initial Identity Validation

3.2.1 Method to Prove Possession of Private Key

The certificate applicant must demonstrate that it rightfully holds the private key corresponding to the public key to be listed in the Certificate.

The method to prove possession of a private key shall be PKCS #10, another cryptographically equivalent demonstration, or another Symantec-approved method. This requirement does not apply where a key pair is generated by a CA on behalf of a Subscriber, for example where pre-generated keys are placed on smart cards.

3.2.2 Authentication of Organization Identity

Whenever a certificate contains an organization name, the identity of the organization and other enrollment information provided by Certificate Applicants (except for Non-verified Subscriber Information) is confirmed in accordance with the procedures set forth in Symantec's documented Validation Procedures.

At a minimum Symantec or an Affiliate shall:

- determine that the organization exists by using at least one third party identity proofing service or database, or alternatively, organizational documentation issued by or filed with the applicable government agency or recognized authority that confirms the existence of the organization,
- confirm by telephone, confirmatory postal mail, or comparable procedure to the Certificate Applicant certain information about the organization, that the organization has authorized the Certificate Application, and that the person submitting the Certificate Application on behalf of the Certificate Applicant is authorized to do so. When a certificate includes the name of an individual as an authorized representative of the Organization, the employment of that individual and his/her authority to act on behalf of the Organization shall also be confirmed.

Where a domain name or e-mail address is included in the certificate Symantec or an Affiliate authenticates the Organization’s right to use that domain name either as a fully qualified Domain name or an e-mail domain.

Additional checks necessary to satisfy United States export regulations and licenses issued by the United States Department of Commerce Bureau of Industry and Science (“BIS”) are performed by Symantec and Affiliates when required.

Validation procedures for issuing Extended Validation SSL Certificates shall be documented in a STN participant’s CPS and comply with the Extended Validation Guidelines.

3.2.3 Authentication of Individual Identity

Authentication procedures for individual identity differ according to the Class of Certificate. The minimum authentication standard for each class of STN certificate is explained in Table 3 below.

Certificate Class	Authentication of Identity
Class 1	No identity authentication. There is a limited confirmation of the Subscriber’s e-mail address by requiring the Subscriber to be able to answer an e-mail to that address.
Class 2	Authenticate identity by matching the identity provided by the Subscriber to: <ul style="list-style-type: none"> • information residing in the database of a Symantec-approved identity proofing service, such as a major credit bureau or other reliable source of information providing services in Symantec’s or the Affiliate’s country or territory, or • information contained in the business records or databases of business information (employee or customer directories) of an RA approving certificates to its own affiliated individuals
Class 3	The authentication of Class 3 individual Certificates is based on the personal (physical) presence of the Certificate Applicant before an agent of the CA or RA, or before a notary public or other official with comparable authority within the Certificate Applicant’s jurisdiction. The agent, notary or other official shall check the identity of the Certificate Applicant against a well-recognized form of government-issued photographic identification, such as a passport or driver’s license and one other identification credential. Class 3 Administrator certificates shall also include authentication of the organization and a confirmation from the organization of the identity and authorization of the person to act as Administrator.

Certificate Class	Authentication of Identity
	Symantec and Affiliates may also have occasion to approve Certificate Applications for their own Administrators. Administrators are “Trusted Persons” within an organization. In this case, authentication of their Certificate Applications shall be based on confirmation of their identity in connection with their employment or retention as an independent contractor and background checking procedures. ⁶
Shared Service Provider Certificates for Non Federal entities	The identity of the Certificate Subscriber is verified in accordance with the requirements of this CP and any additional requirements of the X.509 Certificate Policy for the Federal Bridge Certification Authority (FBCA) and the Symantec Non-Federal Shared Service Provider (SSP) Certification Practice Statement

Table 3. Authentication of individual identity

3.2.4 Non-Verified Subscriber information

Non-verified subscriber information includes:

- Organization Unit (OU)
- Subscriber’s name in Class 1 certificates
- Any other information designated as non-verified in the certificate.

3.2.5 Validation of Authority

Whenever an individual’s name is associated with an Organization name in a certificate in such a way to indicate the individual’s affiliation or authorization to act on behalf of the Organization the CA or RA:

- determines that the organization exists by using at least one third party identity proofing service or database, or alternatively, organizational documentation issued by or filed with the applicable government agency or recognized authority that confirms the existence of the organization, and
- Uses information contained in the business records or databases of business information (employee or customer directories) of an RA approving certificates to its own affiliated individuals or confirms by telephone, confirmatory postal mail, or comparable procedure to the organization, the employment with the Organization of the individual submitting the Certificate Application and, when appropriate, his/her authority to act on behalf of the Organization.

3.2.6 Criteria for Interoperation

The STN may provide interoperation services that allow a non-STN CA to be able to interoperate with the STN by unilaterally certifying that CA. CAs enabled to interoperate in this way will comply with this CP as supplemented by additional policies when required.

⁶ Symantec and Affiliates may approve Administrator Certificates to be associated with a nonhuman recipient such as a device, or a server. Authentication of a Class 3 Administrator Certificate Applications for a non-human recipient shall include:

- Authentication of the existence and identity of the service named as the Administrator in the Certificate Application
- Authentication that the service has been securely implemented in a manner consistent with it performing an Administrative function
- Confirmation of the identity and authorization of the person enrolling for the Administrator certificate for the service named as Administrator in the Certificate Application.

Symantec shall only allow interoperation with the STN of a non-STN CA in circumstances where the CA shall at a minimum:

- Enters into a contractual agreement with Symantec or an Affiliate
- Operates under a CPS that meets STN requirements for the classes of certificates it will issue
- Passes a compliance assessment before being allowed to interoperate
- Passes an annual compliance assessment for ongoing eligibility to interoperate.

3.3 Identification and Authentication for Re-key Requests

Prior to the expiration of an existing Subscriber's Certificate, it is necessary for the Subscriber to obtain a new certificate to maintain continuity of Certificate usage. CAs and RAs generally require that the Subscriber generate a new key pair to replace the expiring key pair (technically defined as "rekey"). However, in certain cases (i.e., for web server certificates) Subscribers may request a new certificate for an existing key pair (technically defined as "renewal").

Generally speaking, both "Rekey" and "Renewal" are commonly described as "Certificate Renewal", focusing on the fact that the old Certificate is being replaced with a new Certificate and not emphasizing whether or not a new key pair is generated. For all Classes and Types of Symantec Certificates, except for Class 3 Server Certificates, this distinction is not important as a new key pair is always generated as part of Symantec's end-user Subscriber Certificate replacement process. However, for Class 3 Server Certificates, because the Subscriber key pair is generated on the web server and most web server key generation tools permit the creation of a new Certificate Request for an existing key pair, there is a distinction between "rekey" and "renewal."

3.3.1 Identification and Authentication for Routine Re-key

The entity approving a Certificate Application for the Subscriber of an end-user Subscriber Certificate shall be responsible for authenticating a request for re-key or renewal. Re-key procedures ensure that the person or organization seeking to renew/rekey an end-user Subscriber Certificate is in fact the Subscriber of the Certificate.

One acceptable procedure is through the use of a Challenge Phrase (or the equivalent thereof), or proof of possession of the private key. Subscribers choose and submit with their enrollment information a Challenge Phrase. Upon renewal of a Certificate, if a Subscriber correctly submits the Subscriber's Challenge Phrase (or the equivalent thereof) with the Subscriber's reenrollment information, and the enrollment information (including contact information⁷) has not changed, a renewal Certificate is automatically issued.

After rekeying or renewal in this fashion, and on at least alternative instances of subsequent rekeying or renewal thereafter, the CA or RA reconfirms the identity of the Subscriber in accordance with the identification and authentication requirements of an original Certificate Application.⁸

3.3.2 Identification and Authentication for Re-key After Revocation

Re-key/renewal after revocation is not permitted if the revocation occurred because:

- the Certificate (other than a Class 1 Certificate) was issued to a person other than the one named as the Subject of the Certificate, or

⁷ If contact information has changed via an approved formal contact change procedure the certificate shall still qualify for automated renewal.

⁸ The authentication of a request to rekey/renew a Class 3 Organizational ASB Certificate, however, requires the use of a Challenge Phrase as well as the same identification and authentication as for the original Certificate Application.

- the Certificate (other than a Class 1 Certificate) was issued without the authorization of the person or entity named as the Subject of such Certificate, or
- the entity approving the Subscriber's Certificate Application discovers or has reason to believe that a material fact in the Certificate Application is false
- the certificate was deemed harmful to the STN.

Subject to the foregoing paragraph, renewal of an Organizational or CA Certificate following revocation of the Certificate is permissible as long as renewal procedures ensure that the organization or CA seeking renewal is in fact the Subscriber of the Certificate. Renewed Organizational Certificates shall contain the same Subject DN as the Subject DN of the Organizational Certificate being renewed.

Renewal of an individual Certificate following revocation must ensure that the person seeking renewal is, in fact, the Subscriber. One acceptable procedure is the use of a Challenge Phrase (or the equivalent thereof). Other than this procedure or another Symantec-approved procedure, the requirements for the identification and authentication of an original Certificate Application shall be used for renewing a Certificate following revocation.

3.4 Identification and Authentication for Revocation Request

Revocation procedures ensure prior to any revocation of any Certificate that the revocation has in fact been requested by the Certificate's Subscriber, the entity that approved the Certificate Application, or the applicable Processing Center.

Acceptable procedures for authenticating the revocation requests of a Subscriber include:

- Having the Subscriber for certain certificate types submit the Subscriber's Challenge Phrase (or the equivalent thereof), and revoking the Certificate automatically if it matches the Challenge Phrase (or the equivalent thereof) on record. (Note that this option may not be available to all customers.)
- Receiving a message from the Subscriber that requests revocation and contains a digital signature verifiable with reference to the Certificate to be revoked,
- Communication with the Subscriber providing reasonable assurances in light of the Class of Certificate that the person or organization requesting revocation is, in fact the Subscriber. Such communication, depending on the circumstances, may include one or more of the following: telephone, facsimile, e-mail, postal mail, or courier service.

CA/RA Administrators are entitled to request the revocation of end-user Subscriber Certificates within the CA's/RA's Sub domain. Symantec and Affiliates authenticate the identity of Administrators via access control using SSL and client authentication before permitting them to perform revocation functions, or another STN-approved procedure.

RAs using an Automated Administration Software Module may submit bulk revocation requests to a Processing Center. Such requests shall be authenticated via a digitally signed request signed with the private key in the RA's Automated Administration hardware token.

The requests to revoke a CA Certificate shall be authenticated by the requesting entity's Superior entity to ensure that the revocation has in fact been requested by the CA.

4. Certificate Life-Cycle Operational Requirements

4.1 Certificate Application

4.1.1 Who Can Submit a Certificate Application?

Below is a list of people who may submit certificate applications:

- Any individual who is the subject of the certificate,
- Any authorized representative of an Organization or entity,
- Any authorized representative of a CA,
- Any authorized representative of an RA.

4.1.2 Enrollment Process and Responsibilities

4.1.2.1 End-User Certificate Subscribers

All end-user Certificate Subscribers shall manifest assent to the relevant Subscriber Agreement that contains representations and warranties described in Section 9.6.3 and undergo an enrollment process consisting of:

- completing a Certificate Application and providing true and correct information,
- generating, or arranging to have generated, a key pair,
- delivering his, her, or its public key, directly or through an RA, to the processing Center,
- demonstrating possession and/or exclusive control of the private key corresponding to the public key delivered to the Processing Center.

4.1.2.2 CA and RA Certificates

Subscribers of CA and RA Certificates enter into a contract with the Superior Entity that will issue the CA or RA Certificate. CA and RA Applicants shall provide their credentials to demonstrate their identity and provide contact information during the contracting process. During this contracting process or, at the latest, prior to the Key Generation Ceremony to create a CA or RA key pair, the applicant shall cooperate with its Superior Entity to determine the appropriate distinguished name and the content of the Certificates to be issued to the applicant.

4.2 Certificate Application Processing

4.2.1 Performing Identification and Authentication Functions

An RA shall perform identification and authentication of all required Subscriber information in terms of Section 3.2.

4.2.2 Approval or Rejection of Certificate Applications

An RA will approve an application for a certificate if the following criteria are met:

- Successful identification and authentication of all required Subscriber information in terms of Section 3.2
- Payment (if applicable) has been received

An RA will reject a certificate application if:

- identification and authentication of all required Subscriber information in terms of Section 3.2 cannot be completed, or
- The Subscriber fails to furnish supporting documentation upon request
- The Subscriber fails to respond to notices within a specified time, or

- Payment (if applicable) has not been received, or
- The RA believes that issuing a certificate to the Subscriber may bring the STN into disrepute

4.2.3 Time to Process Certificate Applications

CAs and RAs begin processing certificate applications within a reasonable time of receipt. There is no time stipulation to complete the processing of an application unless otherwise indicated in the relevant Subscriber Agreement, CPS or other Agreement between STN participants.

A certificate application remains active until rejected.

4.3 Certificate Issuance

4.3.1 CA Actions during Certificate Issuance

A Certificate is created and issued following the approval of a Certificate Application by a CA or following receipt of an RA's request to issue the Certificate. The CA creates and issues to a Certificate Applicant a Certificate based on the information in a Certificate Application following approval of such Certificate Application.

4.3.2 Notifications to Subscriber by the CA of Issuance of Certificate

CAs issuing Certificates to end-user Subscribers shall, either directly or through an RA, notify Subscribers that they have created such Certificates, and provide Subscribers with access to the Certificates by notifying them that their Certificates are available and the means for obtaining them. Certificates shall be made available to end-user Subscribers, either by allowing them to download them from a web site or via a message sent to the Subscriber containing the Certificate.

4.4 Certificate Acceptance

4.4.1 Conduct Constituting Certificate Acceptance

The following conduct constitutes certificate acceptance:

- Downloading a Certificate or installing a Certificate from a message attaching it constitutes the Subscriber's acceptance of the Certificate.
- Failure of the Subscriber to object to the certificate or its content constitutes certificate acceptance.

4.4.2 Publication of the Certificate by the CA

Processing Centers publish the Certificates they issue in a publicly accessible repository.

4.4.3 Notification of Certificate Issuance by the CA to Other Entities

RAs may receive notification of the issuance of certificates they approve.

4.5 Key Pair and Certificate Usage

4.5.1 Subscriber Private Key and Certificate Usage

Use of the Private Key corresponding to the public key in the certificate shall only be permitted once the Subscriber has agreed to the Subscriber Agreement and accepted the certificate. The certificate shall be used lawfully in accordance with Symantec's Subscriber Agreement the terms of this CP and the relevant CPS. Certificate use must be consistent with the KeyUsage field extensions included in the certificate (e.g., if Digital Signature is not enabled then the certificate must not be used for signing).

Subscribers shall protect their private keys from unauthorized use and shall discontinue use of the private key following expiration or revocation of the certificate.

4.5.2 Relying Party Public Key and Certificate Usage

Relying parties shall assent to the terms of the applicable Relying Party Agreement as a condition of relying on the certificate.

Reliance on a certificate must be reasonable under the circumstances. If the circumstances indicate a need for additional assurances, the Relying Party must obtain such assurances for such reliance to be deemed reasonable.

Before any act of reliance, Relying Parties shall independently assess:

- the appropriateness of the use of a Certificate for any given purpose and determine that the Certificate will, in fact, be used for an appropriate purpose that is not prohibited or otherwise restricted by this CP. Symantec, CAs, and RAs are not responsible for assessing the appropriateness of the use of a Certificate.
- That the certificate is being used in accordance with the KeyUsage field extensions included in the certificate (e.g., if Digital Signature is not enabled then the certificate may not be relied upon for validating a Subscriber's signature).
- The status of the certificate and all the CAs in the chain that issued the certificate. If any of the Certificates in the Certificate Chain have been revoked, the Relying Party is solely responsible to investigate whether reliance on a digital signature performed by an end-user Subscriber Certificate prior to revocation of a Certificate in the Certificate chain is reasonable. Any such reliance is made solely at the risk of the Relying party.

Assuming that the use of the Certificate is appropriate, Relying Parties shall utilize the appropriate software and/or hardware to perform digital signature verification or other cryptographic operations they wish to perform, as a condition of relying on Certificates in connection with each such operation. Such operations include identifying a Certificate Chain and verifying the digital signatures on all Certificates in the Certificate Chain.

4.6 Certificate Renewal

Certificate renewal is the issuance of a new certificate to the subscriber without changing the public key or any other information in the certificate. Certificate renewal is supported for Class 3 certificates where the key pair is generated on a web server as most web server key generation tools permit the creation of a new Certificate Request for an existing key pair.

4.6.1 Circumstances for Certificate Renewal

Prior to the expiration of an existing Subscriber's Certificate, it is necessary for the Subscriber to renew a new certificate to maintain continuity of Certificate usage. A certificate may also be renewed after expiration.

4.6.2 Who May Request Renewal

Only the subscriber for an individual certificate or an authorized representative for an Organizational certificate may request certificate renewal

4.6.3 Processing Certificate Renewal Requests

Renewal procedures ensure that the person or organization seeking to renew an end-user Subscriber Certificate is in fact the Subscriber (or authorized by the Subscriber) of the Certificate.

One acceptable procedure is through the use of a Challenge Phrase (or the equivalent thereof), or proof of possession of the private key. Subscribers choose and submit with their enrollment information a Challenge Phrase (or the equivalent thereof). Upon renewal of a Certificate, if a Subscriber correctly submits the Subscriber's Challenge Phrase (or the equivalent thereof) with the Subscriber's reenrollment information, and the enrollment information (including contact information⁹) has not changed, a renewal Certificate is automatically issued. After renewal in this fashion, and on at least alternative instances of subsequent renewal thereafter, the CA or RA shall reconfirm the identity of the Subscriber in accordance with the requirements specified in this CP for the authentication of an original Certificate Application.

Other than this procedure or another Symantec-approved procedure, the requirements for the authentication of an original Certificate Application shall be used for renewing an end-user Subscriber Certificate.

4.6.4 Notification of New Certificate Issuance to Subscriber

Notification of issuance of certificate renewal to the Subscriber is in accordance with Section 4.3.2

4.6.5 Conduct Constituting Acceptance of a Renewal Certificate

Conduct constituting Acceptance of a renewed certificate is in accordance with Section 4.4.1

4.6.6 Publication of the Renewal Certificate by the CA

The renewed certificate is published in the issuing Processing Center's publicly accessible repository.

4.6.7 Notification of Certificate Issuance by the CA to Other Entities

RAs may receive notification of the issuance of certificates they approve.

⁹ If contact information has changed via an approved formal contact change procedure the certificate shall still qualify for automated renewal.

4.7 Certificate Re-Key

Certificate rekey is the application for the issuance of a new certificate that certifies the new public key. Certificate rekey is supported for all certificate Classes.

4.7.1 Circumstances for Certificate Re-Key

Prior to the expiration of an existing Subscriber's Certificate, it is necessary for the Subscriber to re-key the certificate to maintain continuity of Certificate usage. A certificate may also be re-keyed after expiration.

4.7.2 Who May Request Certification of a New Public Key

Only the subscriber for an individual certificate or an authorized representative for an Organizational certificate may request certificate renewal

4.7.3 Processing Certificate Re-Keying Requests

Re-key procedures ensure that the person or organization seeking to renew an end-user Subscriber Certificate is in fact the Subscriber (or authorized by the Subscriber) of the Certificate.

One acceptable procedure is through the use of a Challenge Phrase (or the equivalent thereof), or proof of possession of the private key. Subscribers choose and submit with their enrollment information a Challenge Phrase (or the equivalent thereof). Upon renewal of a Certificate, if a Subscriber correctly submits the Subscriber's Challenge Phrase (or the equivalent thereof) with the Subscriber's reenrollment information, and if the enrollment information (including contact information¹⁰) has not changed, a renewal Certificate is automatically issued. After re-keying in this fashion, and on at least alternative instances of subsequent re-keying thereafter, the CA or RA shall reconfirm the identity of the Subscriber in accordance with the requirements specified in this CP for the authentication of an original Certificate Application.

Other than this procedure or another Symantec-approved procedure, the requirements for the authentication of an original Certificate Application shall be used for re-keying an end-user Subscriber Certificate.

4.7.4 Notification of New Certificate Issuance to Subscriber

Notification of issuance of a re-keyed certificate to the Subscriber is in accordance with Section 4.3.2

4.7.5 Conduct Constituting Acceptance of a Re-Keyed Certificate

Conduct constituting Acceptance of a re-keyed certificate is in accordance with Section 4.4.1

4.7.6 Publication of the Re-Keyed Certificate by the CA

The re-keyed certificate is published in the issuing Processing Center's publicly accessible repository.

¹⁰ If contact information has changed via an approved formal contact change procedure the certificate shall still qualify for automated renewal.

4.7.7 Notification of Certificate Issuance by the CA to Other Entities

RAs may receive notification of the issuance of certificates they approve.

4.8 Certificate Modification

4.8.1 Circumstances for Certificate Modification

Certificate modification refers to the application for the issuance of a new certificate due to changes in the information in an existing certificate (other than the subscriber's public key).

Certificate modification is considered a Certificate Application in terms of Section 4.1.

4.8.2 Who May Request Certificate Modification

See Section 4.1.1

4.8.3 Processing Certificate Modification Requests

An RA shall perform identification and authentication of all required Subscriber information in terms of Section 3.2

4.8.4 Notification of New Certificate Issuance to Subscriber

See Section 4.3.2

4.8.5 Conduct Constituting Acceptance of Modified Certificate

See Section 4.4.1

4.8.6 Publication of the Modified Certificate by the CA

See Section 4.4.2

4.8.7 Notification of Certificate Issuance by the CA to Other Entities

See Section 4.4.3

4.9 Certificate Revocation and Suspension

4.9.1 Circumstances for Revocation

Only in the circumstances listed below, will an end-user Subscriber certificate be revoked by a Processing Center (or by the Subscriber) and published on a CRL. Upon request from a Subscriber who can no longer use (or no longer wishes to use) a certificate for a reason other than one mentioned below, Symantec will flag the certificate as inactive in its database but will not publish the certificate on a CRL.

An end-user Subscriber Certificate is revoked if:

- A Processing Center, a Customer, or a Subscriber has reason to believe or strongly suspects that there has been a Compromise of a Subscriber's private key,
- A Processing Center or a Customer has reason to believe that the Subscriber has materially breached a material obligation, representation, or warranty under the applicable Subscriber Agreement,

- The Subscriber Agreement with the Subscriber has been terminated,
- The affiliation between an Enterprise Customer with a Subscriber is terminated or has otherwise ended,
- In the case of Class 2 certificates issued for internal Symantec test or demo purposes, the certificate shall be revoked after 90 days,
- The affiliation between an organization that is a Subscriber of a Class 3 Organizational ASB Certificate and the organizational representative controlling the Subscriber's private key is terminated or has otherwise ended,
- A Processing Center or a Customer has reason to believe that the Certificate was issued in a manner not materially in accordance with the procedures required by the applicable CPS, the Certificate (other than a Class 1 Certificate) was issued to a person other than the one named as the Subject of the Certificate, or the Certificate (other than a Class 1 Certificate) was issued without the authorization of the person named as the Subject of such Certificate,
- A Processing Center or a Customer has reason to believe that a material fact in the Certificate Application is false,
- A Processing Center or a Customer determines that a material prerequisite to Certificate Issuance was neither satisfied nor waived,
- In the case of Class 3 organizational Certificates, the Subscriber's organization name changes,
- The information within the Certificate, other than Non-verified Subscriber Information, is incorrect or has changed,
- The Subscriber identity has not been successfully re-verified in accordance with section 6.3.2,
- The Subscriber has not submitted payment when due, or
- The continued use of that certificate is harmful to the STN.

When considering whether certificate usage is harmful to the STN, a CA and/or RA considers, among other things, the following:

- The nature and number of complaints received
- The identity of the complainant(s)
- Relevant legislation in force
- Responses to the alleged harmful use from the Subscriber

When considering whether the use of a Code Signing Certificate is harmful to the STN, a CA and/or RA additionally considers among other things, the following:

- The name of the code being signed
- The behavior of the code
- Methods of distributing the code
- Disclosures made to recipients of the code
- Any additional allegations made about the code

Symantec may also revoke an Administrator Certificate if the Administrator's authority to act as Administrator has been terminated or otherwise has ended.

Symantec Subscriber Agreements require end-user Subscribers to immediately notify Symantec of a known or suspected compromise of its private key.

A Processing Center may also revoke an Administrator Certificate if the Administrator's authority to act as Administrator has been terminated or otherwise has ended.

Subscriber Agreements require end-user Subscribers to immediately notify a Processing Center of a known or suspected compromise of its private key.

4.9.2 Who Can Request Revocation

Individual Subscribers can request the revocation of their own individual Certificates through an authorized representative of Symantec or an RA. In the case of organizational Certificates, a duly authorized representative of the organization shall be entitled to request the revocation of Certificates issued to the organization. A duly authorized representative of Symantec, an Affiliate, or a RA shall be entitled to request the revocation of an RA Administrator's Certificate. The entity that approved a Subscriber's Certificate Application shall also be entitled to revoke or request the revocation of the Subscriber's Certificate.

Only Symantec is entitled to request or initiate the revocation of the Certificates issued to its own CAs. Non-Symantec Processing Centers, Service Centers and RAs are entitled, through their duly authorized representatives, to request the revocation of their own Certificates, and their Superior Entities shall be entitled to request or initiate the revocation of their Certificates.

4.9.3 Procedure for Revocation Request

Prior to the revocation of a Certificate, the CA verifies that the revocation has been requested by the Certificate's Subscriber, or the entity that approved the Certificate Application. Acceptable procedures for authenticating Subscriber revocation requests include:

- Having the Subscriber for certain certificate types submit the Subscriber's Challenge Phrase (or an equivalent thereof) and revoking the Certificate automatically if it matches the Challenge Phrase (or an equivalent thereof) on record,
- Receiving a message purporting to be from the Subscriber that requests revocation and contains a digital signature verifiable with reference to the Certificate to be revoked, and
- Communication with the Subscriber providing reasonable assurances in light of the Class of Certificate that the person or organization requesting revocation is, in fact the Subscriber. Depending on the circumstances, such communication may include one or more of the following: telephone, facsimile, e-mail, postal mail, or courier service.

CA/RA Administrators are entitled to request the revocation of end-user Subscriber Certificates within the CA's/RA's Subdomain. Symantec and Affiliates shall authenticate the identity of Administrators via access control using SSL and client authentication before permitting them to perform revocation functions.

RAs using the Automated Administration Software Module may submit bulk revocation requests to Symantec. Such requests are authenticated via a request digitally signed with the private key in the RA's Automated Administration hardware token.

The requests from CAs to revoke a CA Certificate shall be authenticated by their Superior Entities to ensure that the revocation has in fact been requested by the CA.

4.9.4 Revocation Request Grace Period

Revocation requests shall be submitted as promptly as possible within a commercially reasonable time.

4.9.5 Time within Which CA Must Process the Revocation Request

Commercially reasonable steps are taken to process revocation requests without delay.

4.9.6 Revocation Checking Requirements for Relying Parties

Relying Parties shall check the status of Certificates on which they wish to rely. One method by which Relying Parties may check Certificate status is by consulting the most recent CRL from the

CA that issued the Certificate on which the Relying Party wishes to rely. Alternatively, Relying Parties may meet this requirement either by checking Certificate status using the applicable web-based repository or by using OCSP (if available). CAs shall provide Relying Parties with information on how to find the appropriate CRL, web-based repository, or OCSP responder (where available) to check for revocation status.

- For STN PCAs and Class 1-3 Certification Authorities, CRLs are posted in the Symantec Repository at <http://crl.verisign.com>.
- For Managed PKI Lite Customer CAs, CRLs are posted at <http://onsitecrl.verisign.com/OnSitePublic/LatestCRL-G2.crl>.
- For Managed PKI Customer CAs, CRLs are posted in customer-specific repositories, the location of which is communicated to the Managed PKI customer.

A “CRL reference Table” is also posted in the Symantec Repository to enable Relying Parties to determine the location of the CRL for the relevant CA.

4.9.7 CRL Issuance Frequency

CRLs for end-user Subscriber Certificates are issued at least once per day. CRLs for CA Certificates shall be issued at least annually, but also whenever a CA Certificate is revoked. CRLs for Authenticated Content Signing (ACS) Root CAs are published annually and also whenever a CA Certificate is revoked. If a Certificate listed in a CRL expires, it may be removed from later-issued CRLs after the Certificate’s expiration.

Any deviation from this general policy must get approval from the PMA and be published in the appropriate CPS.

4.9.8 Maximum Latency for CRLs

CRLs are posted to the Symantec Repository within a commercially reasonable time after generation. This is generally done automatically within minutes of generation.

4.9.9 On-Line Revocation/Status Checking Availability

Online revocation and other Certificate status information are available via a web-based repository and, where offered, OCSP. Processing Centers shall have a web-based repository that permits Relying Parties to make online inquiries regarding revocation and other Certificate status information. A Processing Center, as part of its contract with a Service Center, shall host such a repository on behalf of the Service Center. Processing Centers provide Relying Parties with information on how to find the appropriate repository to check Certificate status and, if OCSP is available, how to find the correct OCSP responder.

4.9.10 On-Line Revocation Checking Requirements

A relying party must check the status of a certificate on which he/she/it wishes to rely. If a Relying Party does not check the status of a Certificate on which the Relying Party wishes to rely by consulting the most recent relevant CRL, the Relying Party shall check Certificate status by consulting the applicable repository or by requesting Certificate status using the applicable OCSP responder (where OCSP services are available).

4.9.11 Other Forms of Revocation Advertisements Available

Not applicable.

4.9.12 Special Requirements Regarding Key Compromise

STN Participants shall be notified of an actual or suspected CA private key Compromise using commercially reasonable efforts. Processing Centers shall use commercially reasonable efforts to notify potential Relying Parties if they discover, or have reason to believe, that there has been a Compromise of the private key of one of their own CAs or one of the CAs within their sub-domain.

4.9.13 Circumstances for Suspension

Not applicable.

4.9.14 Who Can Request Suspension

Not applicable.

4.9.15 Procedure for Suspension Request

Not applicable.

4.9.16 Limits on Suspension Period

Not applicable.

4.10 Certificate Status Services

4.10.1 Operational Characteristics

The status of public certificates is available via CRL through a Processing Center's website (at a URL specified in that Processing Center's CPS), LDAP directory and via an OCSP responder (where available).

4.10.2 Service Availability

Certificate Status Services shall be available 24x7 without scheduled interruption.

4.10.3 Optional Features

OCSP is an optional status service feature that is not available for all products and must be specifically enabled for other products

4.11 End of Subscription

A subscriber may end a subscription for a STN certificate by:

- Allowing his/her/its certificate to expire without renewing or re-keying that certificate
- Revoking of his/her/its certificate before certificate expiration without replacing the certificates.

4.12 Key Escrow and Recovery

With the exception of enterprises deploying Managed PKI Key Management Services no STN participant may escrow CA, RA or end-user Subscriber private keys.

Enterprise customers using Managed PKI Key Management Service (KMS) can escrow copies of the private keys of Subscribers whose Certificate Applications they approve. The enterprise customer may use KMS operated either out of the enterprise's premises or Symantec's secure data center. If operated out of the enterprise's premises, Symantec does not store copies of Subscriber private keys but nevertheless plays an important role in the Subscriber key recovery process.

4.12.1 Key Escrow and Recovery Policy and Practices

Enterprise customers using the Managed PKI Key Management Service (or an equivalent service approved by Symantec) are permitted to escrow end-user Subscribers' private key. Escrowed private keys shall be stored in encrypted form using the Managed PKI Key Manager software. Except for enterprise customers using the Managed PKI Key Manager Service (or an equivalent service approved by Symantec), the private keys of CAs or end-user Subscribers shall not be escrowed.

End-user Subscriber private keys shall only be recovered under the circumstances permitted within the Managed PKI Key Management Service Administrator's Guide, under which:

- Enterprise customers using Managed PKI Key Manager shall confirm the identity of any person purporting to be the Subscriber to ensure that a purported Subscriber request for the Subscriber's private key is, in fact, from the Subscriber and not an imposter,
- Enterprise customers shall recover a Subscriber's private key without the Subscriber's authorization only for their legitimate and lawful purposes, such as to comply with judicial or administrative process or a search warrant, and not for any illegal, fraudulent, or other wrongful purpose, and
- Such Enterprise customers shall have personnel controls in place to prevent Key Management Service Administrators and other persons from obtaining unauthorized access to private keys.

It is recommended that an Enterprise Customer using KMS:

- Notify the subscribers that their private keys are escrowed
- Protect subscribers' escrowed keys from unauthorized disclosure,
- Protect all information, including the administrator's own key(s) that could be used to recover subscribers' escrowed keys.
- Release subscribers' escrowed keys only for properly authenticated and authorized requests for recovery.
- Revoke the Subscriber's Key pair prior to recovering the encryption key under certain circumstances such as to discontinue the use of a lost certificate.
- Not be required to communicate any information concerning a key recovery to the subscriber except when the subscriber him/herself has requested recovery.
- Not disclose or allow to be disclosed escrowed keys or escrowed key-related information to any third party unless required by the law, government rule or regulation, the enterprise's organization policy, or by order of a court of competent jurisdiction.

4.12.2 Session Key Encapsulation and Recovery Policy and Practices

Private keys are stored in the Key Manager database in encrypted form. Each Subscriber's private key is individually encrypted with its own triple-DES symmetric key. A Key Escrow Record (KER) is generated, then the triple-DES key is combined with a random session key to form a session key mask (MSK). The resulting MSK together with the certificate request information is securely sent and stored in the Managed PKI database at Symantec. The KER (containing the end user's private key) and the individual session key are stored in the Key Manager database.

The Managed PKI database is operated out of Symantec's secure data center. The enterprise customer may choose to operate the Key Manager database either on the enterprise's premises or out of Symantec's secure data center.

Recovery of a private key and digital certificate requires the Managed PKI administrator to securely log on to the Managed PKI Control Center, select the appropriate key pair to recover and click a "recover" hyperlink. Only after an approved administrator clicks the "recover" link is the MSK for that key pair returned from the Managed PKI database. The Key Manager retrieves the session key from the KMD and combines it with the MSK to regenerate the triple-DES key which was used to originally encrypt the private key, allowing recovery of the end user's private key. As a final step, an encrypted PKCS#12 file is returned to the administrator and ultimately distributed to the end user.

5. Facility, Management, and Operational Controls

5.1 Physical Controls

The STN has documented detailed physical control and security policies for CAs and RAs to adhere to. Compliance with these policies is included in the STN independent audit requirements described in Section 8. These documents contain sensitive security information and are only available upon agreement with Symantec. An overview of the requirements is described in the subsections following.

5.1.1 Site Location and Construction

All STN CA and RA operations shall be conducted within a physically protected environment that deters, prevents, and detects unauthorized use of, access to, or disclosure of sensitive information and systems. For Symantec and Affiliates, this environment shall comply with the requirements of Symantec's Security and Audit Requirements (SAR) Guide.

Such requirements are based in part on the establishment of physical security tiers. A tier is a barrier such as a locked door or gate that provides mandatory access control for individuals and requires a positive response (e.g., door or gate unlocks or opens) for each individual to proceed to the next area. Each successive tier provides more restricted access and greater physical security against intrusion or unauthorized access. Moreover, each physical security tier encapsulates the next inner tier, such that an inner tier must be fully contained in an outside tier and cannot have a common outside wall with the outside tier, the outermost tier being the outside wall of the building.

The minimum level of physical security required by the CA or RA is determined by the highest Class of certificates they process. For example, Symantec processes and issues Class 1, 2 and 3 Certificates and therefore operates at the highest level of security required under the STN. CAs or RAs processing or issuing Class 1 or Class 2 certificates are required to implement a level of security appropriate to the specific class of certificate¹¹. CAs and RAs shall describe their Site Location and Construction in more detail in their CPS.

5.1.2 Physical Access

Access to each tier of physical security shall be auditable and controlled so that each tier can be accessed only by authorized personnel.

¹¹ For certain approved internal uses, Symantec RAs operating with a Class 3 certificate containing the Symantec organization name in the DN may perform RA operations with less than Class 3 physical security and monitoring. Certificate issuance under such RA operating protections shall be restricted to Class 2 certificates containing an OU value reflecting the lack of trust in the certificate.

5.1.3 Power and Air Conditioning

The secure facilities of CAs and RAs shall be equipped with primary and backup power systems to ensure continuous, uninterrupted access to electric power. Also, these secure facilities shall be equipped with primary and backup heating/ventilation/air conditioning systems to control temperature and relative humidity.

5.1.4 Water Exposures

The secure facilities of CAs and RAs shall be constructed and equipped, and procedures shall be implemented, to prevent floods or other damaging exposure to water.

5.1.5 Fire Prevention and Protection

The secure facilities of CAs and RAs shall be constructed and equipped, and procedures shall be implemented, to prevent and extinguish fires or other damaging exposure to flame or smoke. These measures shall meet all local applicable safety regulations.

5.1.6 Media Storage

CAs and RAs shall protect the magnetic media holding back ups of critical system data or any other sensitive information from water, fire, or other environmental hazards, and shall use protective measures to deter, detect, and prevent the unauthorized use of, access to, or disclosure of such media.

5.1.7 Waste Disposal

CAs and RAs shall implement procedures for the disposal of waste (paper, media, or any other waste) to prevent the unauthorized use of, access to, or disclosure of waste containing Confidential/Private Information.

5.1.8 Off-Site Backup

CAs and RAs shall maintain back ups of critical system data or any other sensitive information, including audit data, in a secure off-site facility.

5.2 Procedural Controls

5.2.1 Trusted Roles

Employees, contractors, and consultants that are designated to manage infrastructural trustworthiness shall be considered to be "Trusted Persons" serving in a "Trusted Position." Persons seeking to become Trusted Persons by obtaining a Trusted Position shall meet the screening requirements of this CP.

Trusted Persons include all employees, contractors, and consultants that have access to or control authentication or cryptographic operations that may materially affect:

- the validation of information in Certificate Applications;
- the acceptance, rejection, or other processing of Certificate Applications, revocation requests, or renewal requests, or enrollment information;
- the issuance, or revocation of Certificates, including (in the case of Processing Centers) personnel having access to restricted portions of its repository or the handling of Subscriber information or requests.

Trusted Persons include, but are not limited to¹²:

- customer service personnel,
- system administration personnel,
- designated engineering personnel, and
- executives that are designated to manage infrastructural trustworthiness.

5.2.2 Number of Persons Required per Task

CAs and RAs shall establish, maintain, and enforce rigorous control procedures to ensure the segregation of duties based on job responsibility and to ensure that multiple Trusted Persons are required to perform sensitive tasks.

Policy and control procedures are in place to ensure segregation of duties based on job responsibilities. The most sensitive tasks, such as access to and management of CA cryptographic hardware (cryptographic signing unit or CSU) and associated key material, require multiple Trusted Persons.

These internal control procedures are designed to ensure that at a minimum, two trusted personnel are required to have either physical or logical access to the device. Access to CA cryptographic hardware is strictly enforced by multiple Trusted Persons throughout its lifecycle, from incoming receipt and inspection to final logical and/or physical destruction. Once a module is activated with operational keys, further access controls are invoked to maintain split control over both physical and logical access to the device. Persons with physical access to modules do not hold “Secret Shares” and vice versa.

Other manual operations such as the validation and issuance of Class 3 Certificates, not issued by an automated validation and issuance system, require the participation of at least 2 Trusted Persons, or a combination of at least one trusted person and an automated validation and issuance process. Manual operations for Key Recovery may optionally require the validation of two (2) authorized Administrators.

5.2.3 Identification and Authentication for Each Role

CAs and RAs shall confirm the identity and authorization of all personnel seeking to become Trusted before such personnel are:

- issued with their access devices and granted access to the required facilities;
- given electronic credentials to access and perform specific functions on Information Systems and CA or RA systems.

Authentication of identity shall include the personal (physical) presence of such personnel before Trusted Persons performing HR or security functions within an entity, and a check of well-recognized forms of identification, such as passports and driver’s licenses. Identity shall be further confirmed through background checking procedures specified in this CP.

5.2.4 Roles Requiring Separation of Duties

Roles requiring Separation of duties include (but are not limited to)

- the validation of information in Certificate Applications;
- the acceptance, rejection, or other processing of Certificate Applications, revocation requests, key recovery requests or renewal requests, or enrollment information;

¹² For certain approved internal functions Symantec Corporation may identify individuals in the Quality Assurance (QA) and Sales teams as Trusted Roles limited to internal RA functions. Such assigned individuals shall receive training specific to the internal RA functions in accordance with section 5.3.3.

- the issuance, or revocation of Certificates, including personnel having access to restricted portions of the repository;
- the handling of Subscriber information or requests
- the generation, issuing or destruction of a CA certificate
- the loading of a CA to a Production environment

5.3 Personnel Controls

The STN has documented detailed personnel control and security policies for CAs and RAs to adhere to and be audited against. Compliance with these policies is included in the independent audit requirements described in Section 8. These documents contain sensitive security information and are only available by STN participants under agreement with Symantec. An overview of the requirements is described in the subsections following.

5.3.1 Qualifications, Experience, and Clearance Requirements

CAs and RAs shall require that personnel seeking to become Trusted Persons present proof of the requisite background, qualifications, and experience needed to perform their prospective job responsibilities competently and satisfactorily, as well as proof of any government clearances, if any, necessary to perform certification services under government contracts.

5.3.2 Background Check Procedures

CAs and RAs shall conduct background checks for personnel seeking to become Trusted Persons. Background checks shall be repeated for personnel holding Trusted Positions at least every five (5) years. These procedures shall be subject to any limitations on background checks imposed by local law. To the extent one of the requirements imposed by this section cannot be met due to a prohibition or limitation in local law, the investigating entity shall utilize a substitute investigative technique permitted by law that provides substantially similar information, including but not limited to obtaining a background check performed by the applicable governmental agency.

The factors revealed in a background check that may be considered grounds for rejecting candidates for Trusted Positions or for taking action against an existing Trusted Person are discussed in the Symantec Security and Audit Requirements (SAR) Guide and generally include (but are not limited to) the following:

- Misrepresentations made by the candidate or Trusted Person,
- Highly unfavorable or unreliable professional references,
- Certain criminal convictions, and
- Indications of a lack of financial responsibility.

Reports containing such information shall be evaluated by human resources and security personnel, and such personnel shall take actions that are reasonable in light of the type, magnitude, and frequency of the behavior uncovered by the background check. Such actions may include measures up to and including the cancellation of offers of employment made to candidates for Trusted Positions or the termination of existing Trusted Persons. The use of information revealed in a background check to take such actions shall be subject to applicable law.

Background investigation of persons seeking to become a Trusted Person includes:

- a confirmation of previous employment,
- a check of professional references,
- a confirmation of the highest or most relevant educational degree obtained,
- a search of criminal records (local, state or provincial, and national), and

- a check of credit/financial records.

Processing Centers and Affiliate Service Centers shall perform the following additional investigations:

- a search of driver's license records, and
- a search of government social insurance records (analogous to Social Security Administration records in the United States or comparable system outside the United States).

5.3.3 Training Requirements

CAs and RAs shall provide their personnel with the requisite training needed for their personnel to perform their job responsibilities relating to CA or RA operations competently and satisfactorily. They shall also periodically review their training programs, and their training shall address the elements relevant to functions performed by their personnel. Affiliate customer service personnel shall meet Symantec training requirements, as a condition of the Affiliate beginning operations.

Training programs must address the elements relevant to the particular environment of the person being trained, including:

- Security principles and mechanisms of the STN,
- Hardware and software versions in use,
- All duties the person is expected to perform,
- Incident and Compromise reporting and handling, and
- Disaster recovery and business continuity procedures.

5.3.4 Retraining Frequency and Requirements

CAs and RAs shall provide refresher training and updates to their personnel to the extent and frequency required to ensure that such personnel maintain the required level of proficiency to perform their job responsibilities competently and satisfactorily.

5.3.5 Job Rotation Frequency and Sequence

Not applicable.

5.3.6 Sanctions for Unauthorized Actions

CAs and RAs shall establish, maintain, and enforce employment policies for the discipline of personnel following unauthorized actions. Disciplinary actions may include measures up to and including termination and shall be commensurate with the frequency and severity of the unauthorized actions.

5.3.7 Independent Contractor Requirements

CAs and RAs may permit independent contractors or consultants to become Trusted Persons only to the extent necessary to accommodate clearly-defined outsourcing relationships and only under the following conditions:

- the entity using the independent contractors or consultants as Trusted Persons does not have suitable employees available to fill the roles of Trusted Persons, and
- the contractors or consultants are trusted by the entity to the same extent as if they were employees.

Otherwise, independent contractors and consultants shall have access to Symantec's, an Affiliate's, or an Enterprise Customer's secure facility only to the extent they are escorted and directly supervised by Trusted Persons.

5.3.8 Documentation Supplied to Personnel

Symantec, Affiliates, and Enterprise Customers shall provide their personnel with (including Trusted Persons) the requisite training and access to other documentation needed to perform their job responsibilities competently and satisfactorily.

5.4 Audit Logging Procedures

5.4.1 Types of Events Recorded

The types of auditable events that must be recorded by CAs and RAs are set forth below. All logs, whether electronic or manual, shall contain the date and time of the event, and the identity of the entity that caused the event. CAs shall state in their CPS the logs and types of events they record.

Types of auditable events include:

- Operational events (including but not limited to (1) the generation of a CA's own keys and the keys of subordinate CAs, (2) start-up and shutdown of systems and applications, (3) changes to CA details or keys, (4) cryptographic module lifecycle management-related events (e.g., receipt, use, de-installation, and retirement), (5) possession of activation data for CA private key operations, physical access logs, (6) system configuration changes and maintenance, (7) Records of the destruction of media containing key material, activation data, or personal Subscriber information)
- Certificate lifecycle events (including but not limited to initial issuance, re-key, renew, revocation, suspension)
- Trusted employee events (including but not limited to (1) logon and logoff attempts, (2) attempts to create, remove, set passwords or change the system privileges of the privileged users, (3) personnel changes)
- Discrepancy and compromise reports (including but not limited to unauthorized system and network logon attempts)
- Failed read and write operations on the Certificate and repository
- Changes to Certificate creation policies e.g., validity period

5.4.2 Frequency of Processing Log

Audit logs shall be reviewed in response to alerts based on irregularities and incidents within their CA/RA systems. Processing Centers shall compare their audit logs with the supporting manual and electronic logs from their RA Customers and Service Centers when any action is deemed suspicious.

Audit log processing shall consist of a review of the audit logs and documenting the reason for all significant events in an audit log summary. Audit log reviews shall include a verification that the log has not been tampered with, an inspection of all log entries, and an investigation of any alerts or irregularities in the logs. Actions taken based on audit log reviews shall be documented.

5.4.3 Retention Period for Audit Log

Audit logs shall be retained onsite for at least two (2) months after processing and thereafter archived in accordance with Section 5.5.2.

5.4.4 Protection of Audit Log

Audit logs are protected with an electronic audit log system that includes mechanisms to protect the log files from unauthorized viewing, modification, deletion, or other tampering.

5.4.5 Audit Log Backup Procedures

Incremental backups of audit logs are created daily and full backups are performed weekly.

5.4.6 Audit Collection System (Internal vs. External)

No stipulation

5.4.7 Notification to Event-Causing Subject

Where an event is logged by the audit collection system, no notice is required to be given to the individual, organization, device, or application that caused the event.

5.4.8 Vulnerability Assessments

Events in the audit process are logged, in part, to monitor system vulnerabilities. Logical security vulnerability assessments (“LSVAs”) are performed, reviewed, and revised following an examination of these monitored events. LSVAs are based on real-time automated logging data and are performed on a daily, monthly, and annual basis. An annual LSVA will be an input into an entity’s annual Compliance Audit.

5.5 Records Archival

5.5.1 Types of Records Archived

RAs and CAs archive:

- All audit data collected in terms of Section 5.4
- Certificate application information
- Documentation supporting certificate applications
- Certificate lifecycle information e.g., revocation, rekey and renewal application information

5.5.2 Retention Period for Archive

Records shall be retained for at least the time periods set forth below following the date the Certificate expires or is revoked.

- Five (5) years for Class 1 Certificates,
- Ten (10) years and six (6) months for Class 2 and Class 3 Certificates
- Twenty (20) years and six (6) months for Class 4 Certificates

5.5.3 Protection of Archive

An entity maintaining an archive of records shall protect the archive so that only the entity’s authorized Trusted Persons are able to obtain access to the archive. The archive is protected against unauthorized viewing, modification, deletion, or other tampering by storage within a Trustworthy System. The media holding the archive data and the applications required to process the archive data shall be maintained to ensure that the archive data can be accessed for the time period set forth in this CP.

5.5.4 Archive Backup Procedures

Entities compiling electronic information shall incrementally back up system archives of such information on a daily basis and perform full backups on a weekly basis. Copies of paper-based records shall be maintained in an off-site secure facility.

5.5.5 Requirements for Time-Stamping of Records

Certificates, CRLs, and other revocation database entries shall contain time and date information. Such time information need not be cryptographic-based.

5.5.6 Archive Collection System (Internal or External)

Archive collection systems for entities within the STN shall be internal, except for enterprise RA Customers. Processing Centers shall assist their enterprise RAs in preserving an audit trail. Such an archive collection system therefore is external to that enterprise RA. Otherwise, entities within the STN shall utilize internal archive collection systems.

5.5.7 Procedures to Obtain and Verify Archive Information

Only authorized Trusted Personnel are able to obtain access to the archive. The integrity of the information is verified when it is restored.

5.6 Key Changeover

A CA Certificate may be renewed if the CA's Superior Entity reconfirms the identity of the CA. Following such reconfirmation, the Superior Entity shall either approve or reject the renewal application.

Following an approval of a renewal request, the Superior Entity shall conduct a Key Generation Ceremony in order to generate a new key pair for the CA. During such Key Generation Ceremony, the Superior Entity shall sign and issue the CA a new Certificate. Such Key Generation Ceremony shall meet the Key Ceremony requirements documented in the STN's confidential security policies. New CA Certificates containing the new CA public keys generated during such Key Generation Ceremony shall be made available to Relying Parties.

5.7 Compromise and Disaster Recovery

5.7.1 Incident and Compromise Handling Procedures

Backups of the following CA information shall be kept in off-site storage and made available in the event of a Compromise or disaster: Certificate Application data, audit data, and database records for all Certificates issued. Back-ups of CA private keys shall be generated and maintained in accordance with CP § 6.2.4. Processing Centers shall maintain backups of the foregoing CA information for their own CAs, as well as the CAs of Service Centers and Enterprise Customers within their Sub-domains.

5.7.2 Computing Resources, Software, and/or Data Are Corrupted

Following corruption of computing resources, software, and/or data, a report of the incident and a response to the event, shall be promptly made by the affected CA or RA in accordance with the Symantec's documented incident and Compromise reporting and handling procedures in the applicable CPS and the STN's documented confidential security policies.

5.7.3 Entity Private Key Compromise Procedures

In the event of a CA private key compromise that CA will be revoked. Processing Centers use commercially reasonable efforts to notify potential Relying Parties if they discover, or have reason to believe, that there has been a Compromise of the private key of a CA within their sub-domain of the STN.

5.7.4 Business Continuity Capabilities after a Disaster

STN entities operating secure facilities for CA and RA operations develop, test, maintain and, if necessary, implement a disaster recovery plan designed to mitigate the effects of any kind of natural or man-made disaster. Disaster recovery plans address the restoration of information systems services and key business functions. Disaster recovery sites have the equivalent physical security protections specified by the STN.

Processing Centers have the capability of restoring or recovering essential operations within twenty-four (24) hours following a disaster with, at a minimum, support for the following functions: Certificate issuance, Certificate revocation, publication of revocation information, and providing key recovery information for Enterprise Customers using Managed PKI Key Manager. A Processing Center's disaster recovery database shall be synchronized with the production database within the time limits set forth in the Security and Audit Requirements Guide. A Processing Center's disaster recovery equipment shall have the physical security protections documented in the STN's confidential security policies, which includes the enforcement of physical security tiers.

Service Centers have the capability of declaring a disaster on their web sites in their local languages and English, and of directing Subscribers, Relying Parties, and other interested persons to a Processing Center supporting their lifecycle services.

A Service Center or Processing Center disaster recovery plan makes provision for full recovery within one week following disaster occurring at the Service Center's or Processing Center's primary site. Each Service Center and Processing Center shall install and test equipment at its primary site to support CA/RA functions following all but a major disaster that would render the entire facility inoperable. Such equipment ensures redundancy and fault tolerance.

5.8 CA or RA Termination

The termination of a non-STN CA or RA (Affiliate, enterprise Customer) shall be subject to the agreement entered into between the CA to be terminated and its Superior Entity. Both parties shall, in good faith, use commercially reasonable effort to agree on a termination plan that minimizes disruption to Customers, Subscribers, and Relying Parties. The termination plan may cover issues such as:

- Providing notice to parties affected by the termination, such as Subscribers, Relying Parties, and Customers,
- handling of the cost of such notice,
- The revocation of the Certificate issued to the CA by the Superior Entity,
- The preservation of the CA's archives and records for the time periods required in this CP
- The continuation of Subscriber and customer support services,
- The continuation of revocation services, such as the issuance of CRLs or the maintenance of online status checking services,
- The revocation of unexpired unrevoked Certificates of end-user Subscribers and subordinate CAs, if necessary,

- The refund (if necessary) to Subscribers whose unexpired, unrevoked Certificates are revoked under the termination plan or provision, for the issuance of substitute Certificates by a successor CA,
- Disposition of the CA's private key and the hardware token containing such private key,
- Provisions needed for the transition of the CA's services to a successor CA.

6. Technical Security Controls

6.1 Key Pair Generation and Installation

6.1.1 Key Pair Generation

Key pair generation shall be performed using Trustworthy Systems and processes that provide the required cryptographic strength of the generated keys and prevent the loss, disclosure, modification, or unauthorized use of private keys. This requirement applies to end-user Subscribers, Enterprise Customers using Managed PKI Key Manager, CAs pre-generating key pairs on end-user Subscriber hardware tokens and Processing Centers. Processing Centers generate the CA key pairs of the Client Service Centers, and Enterprise Customers in their Sub-domains.

CA keys are generated in a Key Generation Ceremony. All Key Generation Ceremonies conform to the requirements documented in the STN's confidential security policies.

6.1.2 Private Key Delivery to Subscriber

End-user Subscribers' private keys are generally generated by the end-user Subscribers themselves, and therefore private key delivery to a Subscriber is unnecessary. Private keys shall be delivered to end-user Subscribers only when:

- Their Certificate Applications are approved by an Enterprise Customer using Managed PKI Key Manager, or
- Their key pairs are pre-generated on hardware tokens, which are distributed to Certificate Applicants in connection with the enrollment process.

Enterprise Customers using Managed PKI Key Manager (or an equivalent service approved by Symantec) shall use the Managed PKI Key Manager Software (or equivalent software approved by Symantec) and Trustworthy Systems to deliver private keys to Subscribers and shall secure such delivery through the use of a PKCS#12 package or any other comparably equivalent means (e.g., encryption) in order to prevent the loss, disclosure, modification, or unauthorized use of such private keys. Where key pairs are pre-generated on hardware tokens, the entities distributing such tokens shall take commercially reasonable efforts to provide physical security of the tokens to prevent the loss, disclosure, modification, or unauthorized use of the private keys on them.

6.1.3 Public Key Delivery to Certificate Issuer

When a public key is transferred to the issuing CA to be certified, it shall be delivered through a mechanism ensuring that the public key has not been altered during transit and that the Certificate Applicant possesses the private key corresponding to the transferred public key. The acceptable mechanism within the STN for public key delivery is a PKCS#10 Certificate signing request package or an equivalent method ensuring that:

- The public key has not been altered during transit; and
- The Certificate Applicant possesses the private key corresponding to the transferred public key.

Processing Centers performing Key Generation Ceremonies transfer the public key from the cryptographic module where it was created to the cryptographic module of the superior CA (same cryptographic module if a PCA) by wrapping it in a PKCS#10 Certificate signing request.

6.1.4 CA Public Key Delivery to Relying Parties

The public keys of the PCAs are included in Root Certificates that are already embedded within many popular software applications, making special root distribution mechanisms unnecessary.¹³ Also, in many instances, a Relying Party using the S/MIME protocol will automatically receive, in addition to the Subscriber's Certificate, the Certificates (and therefore the public keys) of all CAs subordinate to the relevant PCA.

6.1.5 Key Sizes

Key pairs shall be of sufficient length to prevent others from determining the key pair's private key using cryptanalysis during the period of expected utilization of such key pairs. The STN Standard for minimum key sizes is the use of key pairs equivalent in strength to 2048 bit RSA for PCAs and CAs.¹⁴

Symantec issues a minimum key size equivalent in strength to 2048 bit RSA for RAs and end entity certificates key pairs.

Symantec recommends the use of a minimum key size equivalent in strength to 256 bit ECC for PCA, CA, Registration Authority and end entity certificate key pairs.

The STN Standard for digital signature hash algorithm is the use of either SHA-1 or SHA-2.

6.1.6 Public Key Parameters Generation and Quality Checking

STN Participants using the Digital Signature Standard shall generate the required Key Parameters in accordance with FIPS 186-2 or a PMA-approved equivalent standard.

When STN Participants use the Digital Signature Standard, the quality of the generated Key Parameters shall be verified in accordance with FIPS 186-2 or a PMA-approved equivalent standard.

6.1.7 Key Usage Purposes (as per X.509 v3 Key Usage Field)

Refer to Section 7.1.2.1.

6.2 Private Key Protection and Cryptographic Module Engineering Controls

6.2.1 Cryptographic Module Standards and Controls

Private keys within the STN shall be protected using a Trustworthy System and private key holders shall take necessary precautions to prevent the loss, disclosure, modification, or unauthorized use of such Private Keys in accordance with this CP, contractual obligations and requirements documented in the STN's confidential security policies. End-user Subscribers have the option of protecting their private keys in a smart card or other hardware token. Symantec and

¹³ The Class 1 PCA used to support rudimentary non-federal SSP certificates is not generally distributed and is only made available to Symantec Non-Federal SSP customers

¹⁴ Symantec may retain legacy Trusted Roots with 1024 bit RSA key pairs for support of customer legacy platforms for issuance of 1024-bit RSA end-entity certificates for a limited period.

enterprise RA customers shall protect private key segments on these servers using a Trustworthy System.

Processing Centers shall perform all CA cryptographic operations on cryptographic modules rated at a minimum of FIPS 140-1 level 3. Service Centers shall perform all RA cryptographic operations on a cryptographic module rated at FIPS 140-1 level 2. Symantec recommends that enterprise RA Customers perform all Automated Administration RA cryptographic operations on a cryptographic module rated at least FIPS 140-1 level 2. The requirements for ratings in this section are subject to any applicable local requirements for higher ratings.

6.2.2 Private Key (m out of n) Multi-Person Control

Multi-person control are enforced to protect the activation data needed to activate CA private keys held by Processing Centers in accordance with the standards documented in the STN's confidential security policies. Processing Centers use "Secret Sharing" to split the private key or activation data needed to operate the private key into separate parts called "Secret Shares" held by individuals called "Shareholders." Some threshold number of Secret Shares (m) out of the total number of Secret Shares (n) shall be required to operate the private key.

Processing Centers utilize Secret Sharing to protect the activation data needed to activate their own private keys and other CAs within their respective Subdomains in accordance with the standards documented in the STN's confidential security policies. Processing Centers also use Secret Sharing to protect the activation data needed to activate private keys located at their respective disaster recovery sites.

The threshold number of shares needed to sign a CA certificate is 3. It should be noted that the number of shares distributed for disaster recovery tokens may be less than the number distributed for operational tokens, while the threshold number of required shares remains the same.

6.2.3 Private Key Escrow

CA private keys are not escrowed. Escrow of private keys for end user subscribers is explained in more detail in Section 4.12.

6.2.4 Private Key Backup

CAs shall back up their own private keys so as to be able to recover from disasters and equipment malfunction in accordance with the standards documented in the STN's confidential security policies. Processing Centers shall also back up the private keys of CAs within their Subdomains. Backups shall be made in accordance with these documented policies. Back-ups shall be made by copying such private keys and entering them onto back-up cryptographic modules in accordance with Section 6.2.6 and 6.2.7.

Private keys that are backed up are to be protected from unauthorized modification or disclosure through physical or cryptographic means. Back ups are protected with a level of physical and cryptographic protection equal to or exceeding that for cryptographic modules within the CA site, such as at a disaster recovery site or at another secure off-site facility, such as a bank safe.

The backup of end-user Subscriber private keys subject to the Managed PKI Key Manager service, is governed by Section 4.12. Symantec recommends that Enterprise Customers having Automated Administration tokens and Class 3 end-user Subscribers who are not subject to the Managed PKI Key Manager service back up their private keys and protect them from unauthorized modification or disclosure by physical or cryptographic means.

6.2.5 Private Key Archival

Upon expiration of a STN CA Certificate, the key pair associated with the certificate will be securely retained for a period of at least 5 years using hardware cryptographic modules that meet the requirements of this CPS. These CA key pairs shall not be used for any signing events after the expiration date of the corresponding CA Certificate, unless the CA Certificate has been renewed in terms of this CPS.

6.2.6 Private Key Transfer Into or From a Cryptographic Module

Entry of a private key into a cryptographic module shall use mechanisms to prevent loss, theft, modification, unauthorized disclosure, or unauthorized use of such private key.

Processing Centers generating CA or RA private keys on one hardware cryptographic module and transferring them into another shall securely transfer such private keys into the second cryptographic module to the extent necessary to prevent loss, theft, modification, unauthorized disclosure, or unauthorized use of such private keys. Such transfers shall be limited to making backup copies of the private keys on tokens in accordance with the standards documented in the STN's confidential security policies. Private keys shall be encrypted during such transfer.

STN Participants pre-generating private keys and transferring them into a hardware token, for example transferring generated end-user Subscriber private keys into a smart card, shall securely transfer such private keys into the token to the extent necessary to prevent loss, theft, modification, unauthorized disclosure, or unauthorized use of such private keys.

6.2.7 Private Key Storage on Cryptographic Module

CA or RA private keys held on hardware cryptographic modules are stored in encrypted form.

6.2.8 Method of Activating Private Key

All STN Participants shall protect the activation data for their private keys against loss, theft, modification, unauthorized disclosure, or unauthorized use.

6.2.8.1 Class 1 Certificates

The STN Standard for Class 1 private key protection is for Subscribers to take commercially reasonable measures for the physical protection of the Subscriber's workstation to prevent use of the workstation and its associated private key without the Subscriber's authorization. In addition, Symantec recommends that Subscribers use a password in accordance with Section 6.4.1 or security of equivalent strength to authenticate the Subscriber before the activation of the private key, which includes, for instance, a password to operate the private key, a Windows logon or screen saver password, or a network logon password.

6.2.8.2 Class 2 Certificates

The STN Standard for Class 2 Private Key protection is for Subscribers to:

- Use a password in accordance with Section 6.4.1 or security of equivalent strength to authenticate the Subscriber before the activation of the private key, which includes, for instance, a password to operate the private key, or a Windows logon or screen saver password; and
- Take commercially reasonable measures for the physical protection of the Subscriber's workstation to prevent use of the workstation and its associated private key without the Subscriber's authorization.

When deactivated, private keys shall be kept in encrypted form only.

6.2.8.3 Class 3 Certificates other than Administrator Certificates

The STN Standard for Class 3 private key protection (other than Administrators) is for Subscribers to:

- Use a smart card, biometric access device, or security of equivalent strength to authenticate the Subscriber before the activation of the private key; and
- Take commercially reasonable measures for the physical protection of the Subscriber's workstation to prevent use of the workstation and its associated private key without the Subscriber's authorization.

Use of a password along with a smart card or biometric access device in accordance with Section 6.4.1 is recommended. When deactivated, private keys shall be kept in encrypted form only.

6.2.8.4 Administrators' Private Keys (Class 3)

The STN Standard for Administrators' private key protection requires them to:

- Use a smart card, biometric access device, password in accordance with Section 6.4.1, or security of equivalent strength to authenticate the Administrator before the activation of the private key, which includes, for instance, a password to operate the private key, a Windows logon or screen saver password, or a network logon password; and
- Take commercially reasonable measures for the physical protection of the Administrator's workstation to prevent use of the workstation and its associated private key without the Administrator's authorization.

Symantec recommends that Administrators use a smart card, biometric access device, or security of equivalent strength along with the use of a password in accordance with Section 6.4.1 to authenticate the Administrator before the activation of the private key.

When deactivated, private keys shall be kept in encrypted form only.

6.2.8.5 Enterprise RAs using a Cryptographic Module (with Automated Administration or with Managed PKI Key Manager Service)

The STN Standard for private key protection for Administrators using such a cryptographic module requires them to:

- Use the cryptographic module along with a password in accordance with Section 6.4.1 to authenticate the Administrator before the activation of the private key; and
- Take commercially reasonable measures for the physical protection of the workstation housing the cryptographic module reader to prevent use of the workstation and the private key associated with the cryptographic module without the Administrator's authorization.

6.2.8.6 Private Keys Held by Processing Centers (Class 1-3)

An online CA's private key shall be activated by a threshold number of Shareholders, as defined in Section 6.2.2, supplying their activation data (stored on secure media). Once the private key is activated, the private key may be active for an indefinite period until it is deactivated when the CA goes offline. Similarly, a threshold number of Shareholders shall be required to supply their activation data in order to activate an offline CA's private key. Once the private key is activated, it shall be active only for one time.

6.2.9 Method of Deactivating Private Key

Class 3 End-user Subscribers have an obligation to protect their private keys. Such obligations extend to protection of the private key after a private key operation has taken place. The private key may be deactivated after each operation, upon logging off their system, or upon removal of a smart card from the smart card reader depending upon the authentication mechanism employed by the user.

When an online CA is taken offline by a Processing Center, the Processing Center's personnel shall remove the token containing such CA's private key from the reader in order to deactivate it. With respect to the private keys of offline CAs, after the completion of a Key Generation Ceremony, in which such private keys are used for private key operations, the Processing Center's personnel shall remove the token containing such CAs' private keys from the reader in order to deactivate them. Once removed from the reader, tokens shall be protected in accordance to the Security and Audit Requirements Guide.

6.2.10 Method of Destroying Private Key

Where required, CA private keys are destroyed in a manner that reasonably ensures that there are no residuals remains of the key that could lead to the reconstruction of the key. Processing Center personnel decommission the CA's private key by deleting it using functionality of the token containing such CA's private key so as to prevent its recovery following deletion, while not adversely affecting the private keys of other CAs contained on the token. W This process shall be witnessed in accordance with the standards documented in the STN's confidential security policies.

6.2.11 Cryptographic Module Rating

See Section 6.2.1

6.3 Other Aspects of Key Pair Management

6.3.1 Public Key Archival

CAs shall archive their own public keys, as well as the public keys of all CAs within their Sub-domains, in accordance Section 5.5.

6.3.2 Certificate Operational Periods and Key Pair Usage Periods

The Operational Period for Certificates shall be set according to the time limits set forth in Table 4 below¹⁵. End user Subscriber Certificates that are renewals of existing subscriber certificates may have a longer validity period (up to 3 months).

The usage period for end-user Subscriber key pairs is the same as the Operational Period for their Certificates, except that private keys may continue to be used after the Operational Period for decryption and signature verification. The Operational Period of a Certificate ends upon its expiration or revocation. A CA shall not issue Certificates if their Operational Periods would extend beyond the usage period of the key pair of the CA. Therefore, the CA key pair usage period is necessarily shorter than the operational period of the CA Certificate. Specifically, the usage period is the Operational Period of the CA Certificate minus the Operational Period of the

¹⁵ Individual exceptions must be approved by Symantec for certificate validity periods beyond the limits set in Section 6.3.2 and are strictly limited to certificates using stronger encryption algorithms or longer key lengths, e.g. the use of SHA 2 or ECC algorithms and/or the use of 4096 bit or larger keys. In consideration of approval, additional requirements for protection of the private key may be imposed, such as generation and storage on a Hardware device.

Certificates that the CA issues. Upon the end of the usage period for a Subscriber or CA key pair, the Subscriber or CA shall thereafter cease all use of the key pair, except to the extent a CA needs to sign revocation information until the end of the Operational Period of the last Certificate it has issued.

Certificate Issued By:	Validity Period
PCA self-signed (1024 bit RSA)	Up to 30 years
PCA self-signed (2048 bit RSA)	Up to 50 years
PCA self-signed (256 bit ECC)	Up to 30 years
PCA self-signed (384 bit ECC)	Up to 30 years
PCA to Offline intermediate CA	Generally 10 years but up to 15 years after renewal
PCA to online CA	Generally 5 years but up to 10 years after renewal
Offline intermediate CA to online CA	Generally 5 years but up to 10 years after renewal ¹⁶
Online CA to End-user individual Subscriber	Normally up to 2 years, but under the conditions described below, up to 6 years ¹⁷ with no option to renew or re-key. After 6 years new enrollment is required.
Online CA to End-Entity Organizational Subscriber	Normally up to 3 years. ¹⁸ NOTE: SSL certificates may be valid for up to 6 years. At a minimum, the Distinguished Name of SSL certificates with validity of more than 3 years is re-verified after three years from date of certificate issuance.

Table 4 – Certificate Operational Periods

Except as noted in this section, STN Participants shall cease all use of their key pairs after their usage periods have expired.

Certificates issued by CAs to end-user Subscribers may have Operational Periods longer than two years, up to six years, if the following requirements are met:

- Protection of the Subscriber key pairs in relation to its operational environment for Organization Certificates, operation with the enhanced protection of a data center and for Individual Certificates, the Subscribers' key pairs reside on a hardware token, such as a smart card,
- Subscribers are required to undergo re-authentication procedures at least every 3 years under Section 3.2.3,
- If a Subscriber is unable to complete re-authentication procedures under Section 3.2.3 successfully or is unable to prove possession of such private key when required by the foregoing, the CA shall automatically revoke the Subscriber's Certificate.

Certificates issued to individual Subscribers of the Symantec Non-Federal Shared Services Provider PKI may have a 3-year validity.

Any exception to this procedure requires approval from the PMA and must be documented in the relevant CPS.

¹⁶ If 6-year end-user subscriber certificates are issued, the online CA certificate's operational period will be 10 years with no option to renew. CA re-key will be required after 5 years.

¹⁷ If 6-year end-user subscriber certificates are issued, the online CA certificate's operational period will be 10 years with no option to renew. CA re-key will be required after 5 years.

¹⁸ Organizational end-entity certificates used solely to support the operation of a portion of the STN may be issued with a validity period of 6 years and up to a maximum of 10 years after renewal.

6.4 Activation Data

6.4.1 Activation Data Generation and Installation

STN Participants generating and installing activation data for their private keys shall use methods that protect the activation data to the extent necessary to prevent the loss, theft, modification, unauthorized disclosure, or unauthorized use of such private keys.

To the extent passwords are used as activation data, Subscribers shall generate passwords that cannot easily be guessed or cracked by dictionary attacks. Class 3 end-user Subscribers may not need to generate activation data, for example if they use biometric access devices.

Processing Centers generate activation data for their own CAs' private keys, and for the private keys of CAs and RAs within their Sub-domains, in accordance with the Secret Sharing requirements of this CP and the standards documented in the STN's confidential security policies.

6.4.2 Activation Data Protection

STN Participants shall protect the activation data for their private keys using methods that protect against the loss, theft, modification, unauthorized disclosure, or unauthorized use of such private keys.

End-user Subscribers shall protect the activation data for their private keys, if any, to the extent necessary to prevent the loss, theft, modification, unauthorized disclosure, or unauthorized use of such private keys

Processing Centers utilize Secret Sharing in accordance with this CP and the standards documented in the STN's confidential security policies. Processing Centers provide the procedures and means to enable Shareholders to take the precautions necessary to prevent the loss, theft, modification, unauthorized disclosure, or unauthorized use of the Secret Shares that they possess. Shareholders shall not:

- Copy, disclose, or make the Secret Share available to a third party, or make any unauthorized use of it whatsoever; or
- disclose his, her, or any other person's status as a Shareholder to any third party.

The Secret Shares and any information disclosed to the Shareholder in connection with his or her duties as a Shareholder constitute Confidential/Private Information.

Processing Centers include in their disaster recovery plans provisions for Shareholders making their Secret Shares available at a disaster recovery site after a disaster. Each Processing Center maintains an audit trail of Secret Shares, and Shareholders shall participate in the maintenance of an audit trail.

6.4.3 Other Aspects of Activation Data

6.4.3.1 Activation Data Transmission

To the extent activation data for their private keys are transmitted, STN Participants shall protect the transmission using methods that protect against the loss, theft, modification, unauthorized disclosure, or unauthorized use of such private keys. To the extent Windows or network logon user name/password combination is used as activation data for an end-user Subscriber, the passwords transferred across a network shall be protected against access by unauthorized users.

6.4.3.2 Activation Data Destruction

Activation data for CA private keys shall be decommissioned using methods that protect against the loss, theft, modification, unauthorized disclosure, or unauthorized use of the private keys protected by such activation data. After the record retention periods in Section 5.5.2 lapses, Processing Centers shall decommission activation data by overwriting and/or physical destruction.

6.5 Computer Security Controls

CA and RA functions take place on Trustworthy Systems in accordance with the standards documented in the STN's confidential security policies (in the case of Symantec and Affiliates).

6.5.1 Specific Computer Security Technical Requirements

Processing Centers shall ensure that the systems maintaining CA software and data files are Trustworthy Systems secure from unauthorized access, which can be demonstrated by compliance with audit criteria applicable under Section 5.4.1. In addition, Processing Centers limit access to production servers to those individuals with a valid business reason for access. General application users shall not have accounts on the production servers.

Processing Centers shall have production networks logically separated from other components. This separation prevents network access except through defined application processes. Processing Centers shall use firewalls to protect the production network from internal and external intrusion and limit the nature and source of network activities that may access production systems. Processing Centers shall require the use of passwords with a minimum character length and a combination of alphanumeric and special characters, and shall require that passwords be changed on a periodic basis and whenever necessary. Direct access to a Processing Center's database maintaining the Processing Center's repository shall be limited to Trusted Persons in the Processing Center's operations group having a valid business reason for such access.¹⁹

RAs shall ensure that the systems maintaining RA software and data files are Trustworthy Systems secure from unauthorized access, which can be demonstrated by compliance with audit criteria applicable under Section 5.4.1.

RAs shall logically separate access to these systems and this information from other components. This separation prevents access except through defined processes. RAs shall use firewalls to protect the network from internal and external intrusion and limit the nature and source of activities that may access such systems and information. RAs shall require the use of passwords with a minimum character length and a combination of alphanumeric and special characters, and shall require that passwords be changed on a periodic basis and as necessary. Direct access to the RA's database maintaining Subscriber information shall be limited to Trusted Persons in the RA's operations group having a valid business reason for such access.

6.5.2 Computer Security Rating

No stipulation.

¹⁹ Gateway servers shall include the following functionality: access control to CA services, identification and authentication for launching of CA services, object re-use for CA random access memory, use of cryptography for session communication and database security, archival of CA and end-user Subscriber history and audit data, audit of security related events, self-test of security related CA services, and Trusted path for identification of PKI roles and associated identities

6.6 Life Cycle Technical Controls

6.6.1 System Development Controls

Symantec provides software for CA and RA functions to Processing Centers, Service Centers, and RAs. Such software, to the extent used to manage Class 2 or 3 Certificates, shall be developed within a systems development environments that meet Symantec's development assurance requirements. Symantec shall use a design and development process that enforces quality assurance and process correctness.

The software provided by Symantec, when first loaded, shall provide a method for the entity to verify that the software on the system:

- originated from Symantec,
- has not been modified prior to installation, and
- is the version intended for use

6.6.2 Security Management Controls

Software for CA and RA functions designed to manage Class 2 or 3 Certificates shall be subject to checks to verify its integrity. Symantec provides a hash of all software packages or software updates it provides. This hash can be used to verify the integrity of such software manually. Processing Centers shall also have mechanisms and/or policies in place to control and monitor the configuration of their CA systems. Upon installation, and at least once a day, Processing Centers shall validate the integrity of the CA system.

6.6.3 Life Cycle Security Controls

No stipulation

6.7 Network Security Controls

CA and RA functions are performed using networks secured in accordance with the standards documented in the STN's confidential security policies (in the case of Symantec and Affiliates) to prevent unauthorized access, tampering, and denial-of-service attacks. Communications of sensitive information shall be protected using point-to-point encryption for confidentiality and digital signatures for non-repudiation and authentication.

6.8 Time-Stamping

Certificates, CRLs, and other revocation database entries shall contain time and date information. Such time information need not be cryptographic-based.

7. Certificate, CRL, and OCSP Profiles

7.1 Certificate Profile

STN Certificates generally conform to (a) ITU-T Recommendation X.509 (1997): Information Technology - Open Systems Interconnection - The Directory: Authentication Framework, June 1997 and (b) RFC 5280: Internet X.509 Public Key Infrastructure Certificate and CRL Profile, April 2002 ("RFC 5280").

At a minimum, X.509 STN Certificates shall contain the basic fields and indicated prescribed values or value constraints in Table 5 below:

Field	Value or Value constraint
Serial Number	Unique value per Issuer DN
Signature Algorithm	Object identifier of the algorithm used to sign the certificate (See CP § 7.1.3)
Issuer DN	See Section 7.1.4
Valid From	Universal Coordinate Time base. Synchronized to Master Clock of U.S. Naval Observatory. Encoded in accordance with RFC 5280.
Valid To	Universal Coordinate Time base. Synchronized to Master Clock of U.S. Naval Observatory. Encoded in accordance with RFC 5280.
Subject DN	See CP § 7.1.4
Subject Public Key	Encoded in accordance with RFC 5280
Signature	Generated and encoded in accordance with RFC 5280

Table 5 – Certificate Profile Basic Fields

7.1.1 Version Number(s)

STN Certificates shall be X.509 Version 3 Certificates although certain Root Certificates are permitted to be X.509 Version 1 Certificates to support legacy systems. CA certificates shall be X.509 Version 1 or Version 3 CA Certificates. End-user Subscriber Certificates shall be X.509 Version 3.

7.1.2 Certificate Extensions

Processing Centers shall populate X.509 Version 3 STN Certificates with the extensions required by Section 7.1.2.1-7.1.2.8. Private extensions are permissible, but the use of a private extension(s) is not warranted under this CP and the applicable CPS unless specifically included by reference.

7.1.2.1 Key Usage

X.509 Version 3 Certificates are generally populated in accordance with RFC 5280: Internet X.509 Public Key Infrastructure Certificate and CRL Profile, April 2002. The criticality field of the KeyUsage extension is generally set to FALSE for end entity Subscriber certificates, but TRUE for CA certificates.

Note: The non-Repudiation bit²⁰ is not required to be set in these Certificates because the PKI industry has not yet reached a consensus as to what the non-Repudiation bit means. Until such a consensus emerges, the non-Repudiation bit might not be meaningful for potential Relying Parties. Moreover, the most commonly used applications do not always respect the non-Repudiation bit. Therefore, setting the bit might not help Relying Parties make a trust decision. Consequently, this CPS does not require that the non-Repudiation bit be set. It may be set in the case of dual key pair signature Certificates issued through Managed PKI Key Manager, or as otherwise requested. Any dispute relating to non-repudiation arising from the use of a digital certificate is a matter solely between the Subscriber and the Relying Party(s). Symantec shall incur no liability in relation thereto.

7.1.2.2 Certificate Policies Extension

CertificatePolicies extension of X.509 Version 3 Certificates are populated with the object identifier of this CP in accordance with Section 7.1.6 and with policy qualifiers set forth in Section 7.1.8. The criticality field of this extension shall be set to FALSE.

²⁰ The non-Repudiation bit may also be referred to as ContentCommitment in Digital Certificates in accordance with the X.509 standard

7.1.2.3 Subject Alternative Names

The subjectAltName extension of X.509 Version 3 Certificates are populated in accordance with RFC 5280 with the exception of those issued under Public Lite accounts which may optionally exclude the email address in *SubjAltName*. The criticality field of this extension shall be set to FALSE.

7.1.2.4 Basic Constraints

X.509 Version 3 CA Certificates BasicConstraints extension shall have the CA field set to TRUE. End-user Subscriber Certificates BasicConstraints extension shall have the CA field set to FALSE. The criticality field of this extension shall be set to TRUE for CA Certificates, but may be set to TRUE or FALSE for end-user Subscriber Certificates.

X.509 Version 3 CA Certificates shall have a "pathLenConstraint" field of the BasicConstraints extension set to the maximum number of CA certificates that may follow this Certificate in a certification path. CA Certificates issued to an online Enterprise Customer issuing end-user Subscriber Certificates shall have a "pathLenConstraint" field set to a value of "0" indicating that only an end-user Subscriber Certificate may follow in the certification path.

7.1.2.5 Extended Key Usage

By default, ExtendedKeyUsage is set as a non-critical extension. STN CA Certificates do not include the ExtendedKeyUsage extension.

7.1.2.6 CRL Distribution Points

X.509 Version 3 STN Certificates are populated with a cRLDistributionPoints extension containing the URL of the location where a Relying Party can obtain a CRL to check the Certificate's status. The criticality field of this extension shall be set to FALSE.

7.1.2.7 Authority Key Identifier

X.509 Version 3 STN Certificates are generally populated with an authorityKeyIdentifier extension. The method for generating the keyIdentifier based on the public key of the CA issuing the Certificate shall be calculated in accordance with one of the methods described in RFC 5280. The criticality field of this extension shall be set to FALSE.

7.1.2.8 Subject Key Identifier

If present in X.509 Version 3 STN Certificates, the criticality field of this extension shall be set to FALSE and the method for generating the keyIdentifier based on the public key of the Subject of the Certificate shall be calculated in accordance with one of the methods described in RFC 5280.

7.1.3 Algorithm Object Identifiers

STN Certificates are signed using one of following algorithms.

- **sha256withRSAEncryption** OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) rsadsi(113549) pkcs(1) pkcs-1(1) 11}
- **ecdsa-with-Sha256** OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) ansi-X9-62(10045) signatures(4) ecdsa-with-SHA2 (3) 2}
- **ecdsa-with-Sha384** OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) ansi-X9-62(10045) signatures(4) ecdsa-with-SHA2 (3) 3}

- ***sha-1WithRSAEncryption*** OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) rsadsi(113549) pkcs(1) pkcs-1(1) 5}
- ***md5WithRSAEncryption*** OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) rsadsi(113549) pkcs(1) pkcs-1(1) 4}

Certificate signatures produced using these algorithms shall comply with RFC 3279. Either *sha-1WithRSAEncryption* or *sha-256WithRSAEncryption* is used over *md5WithRSAEncryption*²¹.

Certain versions of Processing Center support the use of SHA-256, SHA-384 and SHA-512 encryption algorithms in end-entity Subscriber Certificates.

7.1.4 Name Forms

STN Certificates are populated with the name required under Section 3.1.1. In addition, end-user Subscriber Certificates generally include an additional Organizational Unit field that contains a notice stating that the terms of use of the Certificate are set forth in a URL, and the URL shall be a pointer to the applicable Relying Party Agreement. Exceptions to the foregoing requirement shall be permitted when space, formatting, or interoperability limitations within Certificates make such an Organizational Unit impossible to use in conjunction with the application for which the Certificates are intended, or if a pointer to the applicable Relying Party Agreement is included in the policy extension of the certificate.

7.1.5 Name Constraints

No stipulation

7.1.6 Certificate Policy Object Identifier

The object identifier for the Certificate policy corresponding to each Class of Certificate is set forth in Section 1.2. The CertificatePolicies extension in each X.509 Version 3 STN Certificate is populated in accordance with Section 1.2.²²

7.1.7 Usage of Policy Constraints Extension

No stipulation

7.1.8 Policy Qualifiers Syntax and Semantics

X.509 Version 3 STN Certificates contain a policy qualifier within the Certificate Policies extension. Generally, such Certificates contain a CPS pointer qualifier that points to the applicable Relying Party Agreement or the applicable CPS. In addition, some Certificates contain a User Notice Qualifier which points to the applicable Relying Party Agreement.

7.1.9 Processing Semantics for the Critical Certificate Policies Extension

No stipulation

7.2 CRL Profile

CRLs conform to RFC 5280 and contain the basic fields and contents specified in Table 8 below:

²¹ *md5WithRSAEncryption* is used only with prior approval to preserve business continuity of legacy applications.

²² Certain certificates issued under the STN may contain legacy policy OIDs assigned under the STN.

Field	Value or Value constraint
Version	See Section 7.2.1.
Signature Algorithm	Algorithm used to sign the CRL in accordance with RFC 3279. (See CP § 7.1.3)
Issuer	Entity who has signed and issued the CRL.
Effective Date	Issue date of the CRL. CRLs are effective upon issuance.
Next Update	Date by which the next CRL will be issued. CRL issuance frequency is in accordance with the requirements of Section 4.9.7.
Revoked Certificates	Listing of revoked certificates, including the Serial Number of the revoked Certificate and the Revocation Date.

Table 8 – CRL Profile Basic Fields

7.2.1 Version Number(s)

The STN supports both X.509 Version1 and Version 2 CRLs.

7.2.2 CRL and CRL Entry Extensions

No stipulation

7.3 OCSP Profile

OCSP (Online Certificate Status Protocol) is a way to obtain timely information about the revocation status of a particular certificate. Symantec validates:

- Class 2 Enterprise certificates using the Enterprise OCSP which conforms to RFC 2560, and
- Class 2 Enterprise certificates and Class 3 organization certificates using the Symantec Global Trusted Validation protocol (TGV) which conforms to RFC 5019.

7.3.1 Version Number(s)

Version 1 of the OCSP specification as defined by RFC2560 and Version 1 of the OCSP specification as defined by RFC 5019 are supported.

7.3.2 OCSP Extensions

Symantec TGV Service uses secure timestamp and validity period to establish the current freshness of each OCSP response. Symantec does not use a nonce to establish the current freshness of each OCSP response and clients should not expect a nonce in the response to a request that contains a nonce. Instead, clients should use the local clock to check for response freshness.

8. Compliance Audit and Other Assessments

Symantec and Affiliates undergo a periodic compliance audit (“Compliance Audit”) to ensure compliance with STN Standards after they begin operations.

In addition to these compliance audits, Symantec and Affiliates shall be entitled to perform other reviews and investigations to ensure the trustworthiness of the STN, which include, but are not limited to:

- A “Security and Practices Review” of an Affiliate before it is permitted to begin operations. A Security and Practices Review consists of a review of an Affiliate’s secure facility,

- security documents, CPS, STN-related agreements, privacy policy, and validation plans to ensure that the Affiliate meets STN Standards.
- Symantec shall be entitled, within its sole and exclusive discretion, to perform at any time an “Exigent Audit/Investigation” on itself, an Affiliate, or an Enterprise Customer in the event Symantec or the Superior Entity of the entity to be audited has reason to believe that the audited entity has failed to meet STN Standards, has experienced an incident or compromise, or has acted or failed to act, such that the audited entity’s failure, the incident or compromise, or the act or failure to act poses an actual or potential threat to the security or integrity of the STN.
 - Symantec shall be entitled to perform “Supplemental Risk Management Reviews” on itself, an Affiliate, or a Customer following incomplete or exceptional findings in a Compliance Audit or as part of the overall risk management process in the ordinary course of business.

Symantec shall be entitled to delegate the performance of these audits, reviews, and investigations to the Superior Entity of the entity being audited, reviewed, or investigated or to a third party audit firm. Entities that are subject to an audit, review, or investigation shall provide reasonable cooperation with Symantec and the personnel performing the audit, review, or investigation.

8.1 Frequency and Circumstances of Assessment

Compliance Audits are conducted at least annually at the sole expense of the audited entity.

8.2 Identity/Qualifications of Assessor

A third party auditing firm shall perform the Compliance Audits of Symantec and Affiliates.

Reviews and audits performed by a third party audit firm shall be performed by a certified public accounting firm with demonstrated expertise in computer security or by accredited computer security professionals employed by a competent security consultancy. Such firm shall also have demonstrated expertise in the performance of IT security and PKI compliance audits.

8.3 Assessor's Relationship to Assessed Entity

Compliance Audits performed by third-party audit firms shall be conducted by firms independent of the audited entity. Such firms shall not have a conflict of interest that hinders their ability to perform auditing services.

8.4 Topics Covered by Assessment

Audit topics for each category of entity are set forth below. The audited entity may make a Compliance Audit a module that is part of an overall annual audit of the entity’s information systems.

Audits of RAs (Class 1-2)

It is recommended that Enterprise customers approving Class 1 and 2 certificates undergo an annual compliance audit. Upon request from Symantec and/or a Superior Entity (if the Superior Entity is not Symantec), Enterprise customers shall undergo an audit noting any exceptions or irregularities to STN policies and the steps taken to remedy the irregularities.

Audit of an RA (Class 3)

It is recommended that Enterprise Customers authorizing the issuance of Class 3 SSL certificates undergo an annual compliance audit of their obligations under the STN.²³ Upon request from Symantec and/or a Superior Entity (if the Superior Entity is not Symantec) Enterprise Customers shall undergo an audit noting any exceptions or irregularities to STN policies and the steps taken to remedy the irregularities.

Audit of Symantec or an Affiliate (Class 1-3)

Symantec and each Affiliate shall be audited pursuant to the guidelines provided in the American Institute of Certificate Public Accounts' Statement on Service Organizations Control (SOC) Reports on the risks associated with Service Organizations. Their Compliance Audits shall be a WebTrust for Certification Authorities or an equivalent audit standard approved by Symantec which includes: A Report of Policies and Procedures in Operation and Test of Operational Effectiveness.

8.5 Actions Taken as a Result of Deficiency

After receiving a Compliance Audit report, the audited entity's Superior Entity shall contact the audited party to discuss any exceptions or deficiencies shown by the Compliance Audit. Symantec shall also be entitled to discuss such exceptions or deficiencies with the audited party. The audited entity and the Superior Entity shall, in good faith, use commercially reasonable efforts to agree on a corrective action plan for correcting the problems causing the exceptions or deficiencies and to implement the plan.

In the event of the audited entity's failure to develop such a corrective action plan or implement it, or if the report reveals exceptions or deficiencies that Symantec and the audited entity's Superior Entity reasonably believe pose an immediate threat to the security or integrity of the STN, then:

- (a) Symantec and/or the Superior Entity shall determine whether revocation and compromise reporting are necessary,
- (b) Symantec and the Superior Entity shall be entitled to suspend services to the audited entity, and
- (c) If necessary, Symantec and the Superior Entity may terminate such services subject to this CP and the terms of the audited entity's contract with its Superior Entity

8.6 Communications of Results

Following any Compliance Audit, the audited entity shall provide Symantec and its Superior Entity (if the Superior Entity is not Symantec) with the annual report and attestations based on its audit or self-audit within fourteen (14) days after the completion of the audit and no later than forty-five (45) days after the anniversary date of commencement of operations.

²³ Symantec and/or Affiliates perform all identification and authentication of Class 3 SSL certificates authorized for issuance by the Enterprise Customers.

9. Other Business and Legal Matters

9.1 Fees

9.1.1 Certificate Issuance or Renewal Fees

Symantec, Affiliates, and RA Customers are entitled to charge end-user Subscribers for the issuance, management, and renewal of Certificates.

9.1.2 Certificate Access Fees

Symantec, Affiliates, and RA Customers shall not charge a fee as a condition of making a Certificate available in a repository or otherwise making Certificates available to Relying Parties.

9.1.3 Revocation or Status Information Access Fees

Symantec and Affiliates shall not charge a fee as a condition of making the CRLs required by this CP available in a repository or otherwise available to Relying Parties. They shall, however, be entitled to charge a fee for providing customized CRLs, OCSP services, or other value-added revocation and status information services. Symantec and Affiliates shall not permit access to revocation information, Certificate status information, or time stamping in their repositories by third parties that provide products or services that utilize such Certificate status information without Symantec's prior express written consent.

9.1.4 Fees for Other Services

Symantec and Affiliates do not charge a fee for access to this CP or their respective CPS. Any use made for purposes other than simply viewing the document, such as reproduction, redistribution, modification, or creation of derivative works, shall be subject to a license agreement with the entity holding the copyright to the document.

9.1.5 Refund Policy

To the extent permitted by applicable law, Symantec, Affiliates, and Resellers shall implement a refund policy. They shall place their refund policies within their web sites (including a listing in their repositories), in their Subscriber Agreements, and, in the case of Symantec and Affiliates, in their CPSs.

9.2 Financial Responsibility

9.2.1 Insurance Coverage

Symantec, Affiliates and Enterprise Customers (when required) shall maintain a commercially reasonable level of insurance coverage for errors and omissions, either through an errors and omissions insurance program with an insurance carrier or a self-insured retention. This insurance requirement does not apply to governmental entities.

9.2.2 Other Assets

Symantec, Affiliates and Enterprise Customers shall have sufficient financial resources to maintain their operations and perform their duties, and they must be reasonably able to bear the risk of liability to Subscribers and Relying Parties.

9.2.3 Extended Warranty Coverage

Some STN participants offer extended warranty programs that provides SSL and code signing certificate subscribers with protection against loss or damage that is due to a defect in the participant's issuance of the certificate or other malfeasance caused by participant's negligence or breach of its contractual obligations, provided that the subscriber of the certificate has fulfilled its obligations under the applicable service agreement. STN participants offering extended warranty programs are required to include program information in their CPS.

9.3 Confidentiality of Business Information

9.3.1 Scope of Confidential Information

The following records of Subscribers shall, subject to Section 9.3.2, be kept confidential and private ("Confidential/Private Information"):

- CA application records, whether approved or disapproved,
- Certificate Application records,
- Private keys held by enterprise RA Customers using Managed PKI Key Manager and information needed to recover such Private Keys,
- Transactional records (both full records and the audit trail of transactions),
- STN audit trail records created or retained by Symantec, an Affiliate, or a Customer,
- STN audit reports created by Symantec, an Affiliate, or a Customer (to the extent such reports are maintained), or their respective auditors (whether internal or public),
- Contingency planning and disaster recovery plans, and
- Security measures controlling the operations of Symantec or Affiliate hardware and software and the administration of Certificate services and designated enrollment services.

9.3.2 Information Not Within the Scope of Confidential Information

STN Participants acknowledge that Certificates, Certificate revocation and other status information, repositories of STN Participants, and information contained within them are not considered Confidential/Private Information. Information not expressly deemed Confidential/Private Information under Section 9.3.1 shall be considered neither confidential nor private. This section is subject to applicable privacy laws.

9.3.3 Responsibility to Protect Confidential Information

STN participants receiving private information shall secure it from compromise and disclosure to third parties.

9.4 Privacy of Personal Information

9.4.1 Privacy Plan

Symantec and Affiliates shall implement a privacy policy in accordance with the Affiliate Practices Legal Requirements Guidebook. Such privacy policies shall conform to applicable local privacy laws. Symantec and Affiliates shall not disclose or sell the names of Certificate Applicants or other identifying information about them, subject to Section 9.3.2 and to the right of a terminating CA to transfer such information to a successor CA under Section 5.8.

9.4.2 Information Treated as Private

Any information about Subscribers that is not publicly available through the content of the issued certificate, certificate directory and online CRLs is treated as private.

9.4.3 Information Not Deemed Private

Subject to local laws, all information made public in a certificate is deemed not private.

9.4.4 Responsibility to Protect Private Information

STN participants receiving private information shall secure it from compromise and disclosure to third parties and shall comply with all local privacy laws in their jurisdiction.

9.4.5 Notice and Consent to Use Private Information

Unless where otherwise stated in this CP, the applicable Privacy Policy or by agreement, private information will not be used without the consent of the party to whom that information applies. This section is subject to applicable privacy laws

9.4.6 Disclosure Pursuant to Judicial or Administrative Process

STN Participants acknowledge that Symantec and the Affiliate shall be entitled to disclose Confidential/Private Information if, in good faith, Symantec or the Affiliate believes that:

- Disclosure is necessary in response to subpoenas and search warrants.
- Disclosure is necessary in response to judicial, administrative, or other legal process during the discovery process in a civil or administrative action, such as subpoenas, interrogatories, requests for admission, and requests for production of documents.

This section is subject to applicable privacy laws.

9.4.7 Other Information Disclosure Circumstances

Privacy policies shall contain provisions relating to the disclosure of Confidential/Private Information to the person disclosing it to Symantec or the Affiliate. This section is subject to applicable privacy laws.

9.5 *Intellectual Property Rights*

The allocation of Intellectual Property Rights among STN Participants other than Subscribers and Relying Parties shall be governed by the applicable agreements between such STN Participants. The following subsections of Section 9.5 apply to the Intellectual Property Rights in relation to Subscribers and Relying Parties.

9.5.1 Property Rights in Certificates and Revocation Information

CAs retain all Intellectual Property Rights in and to the Certificates and revocation information that they issue. Symantec, Affiliates, and Customers shall grant permission to reproduce and distribute Certificates on a nonexclusive royalty-free basis, provided that they are reproduced in full and that use of Certificates is subject to the Relying Party Agreement referenced in the Certificate. Symantec, Affiliates, and Customers shall grant permission to use revocation information to perform Relying Party functions subject to the applicable CRL Usage Agreement, Relying Party Agreement, or any other applicable agreements.

9.5.2 Property Rights in the CP

STN Participants acknowledge that Symantec retains all Intellectual Property Rights in and to this CP.

9.5.3 Property Rights in Names

A Certificate Applicant retains all rights it has (if any) in any trademark, service mark, or trade name contained in any Certificate Application and distinguished name within any Certificate issued to such Certificate Applicant.

9.5.4 Property Rights in Keys and Key Material

Key pairs corresponding to Certificates of CAs and end-user Subscribers are the property of the CAs and end-user Subscribers that are the respective Subjects of these Certificates, subject to the rights of enterprise Customers using Managed PKI Key Manager, regardless of the physical medium within which they are stored and protected, and such persons retain all Intellectual Property Rights in and to these key pairs. Without limiting the generality of the foregoing, Symantec's root public keys and the root Certificates containing them, including all PCA public keys and self-signed Certificates, are the property of Symantec. Symantec licenses software and hardware manufacturers to reproduce such root Certificates to place copies in trustworthy hardware devices or software. Finally, Secret Shares of a CA's private key are the property of the CA, and the CA retains all Intellectual Property Right in and to such Secret Shares even though they cannot obtain physical possession of the those shares or the CA from Symantec.

9.6 Representations and Warranties

9.6.1 CA Representations and Warranties

STN CAs warrant that:

- There are no material misrepresentations of fact in the Certificate known to or originating from the entities approving the Certificate Application or issuing the Certificate,
- There are no errors in the information in the Certificate that were introduced by the entities approving the Certificate Application or issuing the Certificate as a result of a failure to exercise reasonable care in managing the Certificate Application or creating the Certificate,
- Their Certificates meet all material requirements of this CP and the applicable CPS, and
- Revocation services and use of a repository conform to all material requirements of this CP and the applicable CPS in all material aspects.

Subscriber Agreements may include additional representations and warranties

9.6.2 RA Representations and Warranties

STN RAs warrant that:

- There are no material misrepresentations of fact in the Certificate known to or originating from the entities approving the Certificate Application or issuing the Certificate,
- There are no errors in the information in the Certificate that were introduced by the entities approving the Certificate Application as a result of a failure to exercise reasonable care in managing the Certificate Application,
- Their Certificates meet all material requirements of this CP and the applicable CPS, and
- Revocation services (when applicable) and use of a repository conform to all material requirements of this CP and the applicable CPS in all material aspects.

Subscriber Agreements may include additional representations and warranties

9.6.3 Subscriber Representations and Warranties

Subscribers warrant that:

- Each digital signature created using the private key corresponding to the public key listed in the Certificate is the digital signature of the Subscriber and the Certificate has been accepted and is operational (not expired or revoked) at the time the digital signature is created,
- Their private key is protected and that no unauthorized person has ever had access to the Subscriber's private key,
- All representations made by the Subscriber in the Certificate Application the Subscriber submitted are true,
- All information supplied by the Subscriber and contained in the Certificate is true,
- The Certificate is being used exclusively for authorized and legal purposes, consistent with all material requirements of this CP and the applicable CPS, and
- The Subscriber is an end-user Subscriber and not a CA, and is not using the private key corresponding to any public key listed in the Certificate for purposes of digitally signing any Certificate (or any other format of certified public key) or CRL, as a CA or otherwise.

Subscriber Agreements may include additional representations and warranties

9.6.4 Relying Party Representations and Warranties

Relying Party Agreements require Relying Parties to acknowledge that they have sufficient information to make an informed decision as to the extent to which they choose to rely on the information in a Certificate, that they are solely responsible for deciding whether or not to rely on such information, and that they shall bear the legal consequences of their failure to perform the Relying Party obligations in terms of this CP.

Relying Party Agreements may include additional representations and warranties.

9.6.5 Representations and Warranties of Other Participants

No stipulation.

9.7 *Disclaimers of Warranties*

To the extent permitted by applicable law, Subscriber Agreements and Relying Party Agreements shall disclaim Symantec's and the applicable Affiliate's possible warranties, including any warranty of merchantability or fitness for a particular purpose, outside the context of the NetSure Protection Plan.

9.8 *Limitations of Liability*

To the extent permitted by applicable law, Subscriber Agreements and Relying Party Agreements shall limit Symantec's and the applicable Affiliates' liability outside the context of the NetSure Protection Plan. Limitations of liability shall include an exclusion of indirect, special, incidental, and consequential damages. They shall also include the following liability caps limiting Symantec's and the Affiliate's damages concerning a specific Certificate:

Class	Liability Caps
Class 1	One Hundred U.S. Dollars (\$ 100.00 US)
Class 2	Five Thousand U.S. Dollars (\$ 5,000.00 US)
Class 3	One Hundred Thousand U.S. Dollars (\$ 100,000.00 US)

Table 9 – Liability Caps

The liability caps in Table 5 limit damages recoverable outside the context of the NetSure Protection Plan. Amounts paid under the NetSure Protection Plan are subject to their own liability caps. The liability caps under the NetSure Protection Plan for different kinds of Certificates range from \$50,000 US to \$250,000 US. See the NetSure Protection Plan for more detail at www.symauth.com/repository/netsure/.

The liability (and/or limitation thereof) of Subscribers shall be as set forth in the applicable Subscriber Agreements.

The liability (and/or limitation thereof) of enterprise RAs and the applicable CA shall be set out in the agreement(s) between them.

The liability (and/or limitation thereof) of Relying Parties shall be as set forth in the applicable Relying Party Agreements.

9.9 Indemnities

9.9.1 Indemnification by Subscribers

To the extent permitted by applicable law, Subscribers are required to indemnify CAs or RAs (both STN and non-STN) for:

- Falsehood or misrepresentation of fact by the Subscriber on the Subscriber's Certificate Application,
- Failure by the Subscriber to disclose a material fact on the Certificate Application, if the misrepresentation or omission was made negligently or with intent to deceive any party,
- The Subscriber's failure to protect the Subscriber's private key, to use a Trustworthy System, or to otherwise take the precautions necessary to prevent the compromise, loss, disclosure, modification, or unauthorized use of the Subscriber's private key, or
- The Subscriber's use of a name (including without limitation within a common name, domain name, or e-mail address) that infringes upon the Intellectual Property Rights of a third party.

The applicable Subscriber Agreement may include additional indemnity obligations

9.9.2 Indemnification by Relying Parties

To the extent permitted by applicable law, Relying Party Agreements shall require Relying Parties to indemnify CAs or RAs (both STN and non-STN) for:

- The Relying Party's failure to perform the obligations of a Relying Party,
- The Relying Party's reliance on a Certificate that is not reasonable under the circumstances, or
- The Relying Party's failure to check the status of such Certificate to determine if the Certificate is expired or revoked.

The applicable Relying Party Agreement may include additional indemnity obligations.

9.10 Term and Termination

9.10.1 Term

The CP becomes effective upon publication in the Symantec Repository. Amendments to this CP become effective upon publication in the Symantec Repository.

9.10.2 Termination

This CP as amended from time to time shall remain in force until it is replaced by a new version.

9.10.3 Effect of Termination and Survival

Upon termination of this CP, STN participants are nevertheless bound by its terms for all certificates issued for the remainder of the validity periods of such certificates.

9.11 Individual Notices and Communications with Participants

Unless otherwise specified by agreement between the parties, STN participants shall use commercially reasonable methods to communicate with each other, taking into account the criticality and subject matter of the communication.

9.12 Amendments

9.12.1 Procedure for Amendment

Amendments to this CP may be made by the Symantec Trust Network Policy Management Authority. Amendments shall either be in the form of a document containing an amended form of the CP or an update. Amended versions or updates shall be linked to the Practices Updates and Notices section of the Symantec Repository located at: www.symauth.com/repository/updates. Updates supersede any designated or conflicting provisions of the referenced version of the CP. The PMA shall determine whether changes to the CP require a change in the Certificate policy object identifiers of the Certificate policies corresponding to each Class of Certificate.

9.12.2 Notification Mechanism and Period

Symantec and the PMA reserve the right to amend the CP without notification for amendments that are not material, including without limitation corrections of typographical errors, changes to URLs, and changes to contact information. The PMA's decision to designate amendments as material or non-material shall be within the PMA's sole discretion.

The PMA shall send Affiliates notice of material amendments to the CP proposed by the PMA. The notice shall state the text of the proposed amendments and the comment period. Proposed amendments to the CP shall also appear in the Practices Updates and Notices section of the Symantec Repository, which is located at: www.symauth.com/repository/updates. Affiliates shall publish or provide a link to the proposed amendments on their own web-based repositories within a reasonable time after receiving notice of such amendments.

The PMA solicits proposed amendments to the CP from other STN Participants. If the PMA considers such an amendment desirable and proposes to implement the amendment, the PMA shall provide notice of such amendment in accordance with this section.

Notwithstanding anything in the CP to the contrary, if the PMA believes that material amendments to the CP are necessary immediately to stop or prevent a breach of the security of the STN or any

portion of it, Symantec and the PMA shall be entitled to make such amendments by publication in the Symantec Repository. Such amendments will be effective immediately upon publication. Within a reasonable time after publication, Symantec shall provide notice to Affiliates of such amendments.

9.12.2.1 Comment Period

Except as otherwise stated, the comment period for any material amendments to the CP shall be fifteen (15) days, starting on the date on which the amendments are posted on the Symantec Repository. Any STN Participant shall be entitled to file comments with the PMA up until the end of the comment period.

9.12.2.2 Mechanism to Handle Comments

The PMA shall consider any comments on the proposed amendments. The PMA shall either (a) allow the proposed amendments to become effective without amendment, (b) amend the proposed amendments and republish them as a new amendment when required, or (c) withdraw the proposed amendments. The PMA is entitled to withdraw proposed amendments by notifying Affiliates and providing notice in the Practices Updates and Notices section of the Symantec Repository. Unless proposed amendments are amended or withdrawn, they shall become effective upon the expiration of the comment period.

9.12.3 Circumstances under Which OID Must be Changed

If the PMA determines that a change is necessary in the object identifier corresponding to a Certificate policy, the amendment shall contain new object identifiers for the Certificate policies corresponding to each Class of Certificate. Otherwise, amendments shall not require a change in Certificate policy object identifier.

9.13 Dispute Resolution Provisions

9.13.1 Disputes among Symantec, Affiliates, and Customers

Disputes among one or more of any of Symantec, Affiliates, and/or Customers shall be resolved pursuant to provisions in the applicable agreements among the parties.

9.13.2 Disputes with End-User Subscribers or Relying Parties

To the extent permitted by applicable law, Subscriber Agreements and Relying Party Agreements shall contain a dispute resolution clause. The procedures in the Affiliate Practices Legal Requirements Guidebook to resolve disputes involving Symantec require an initial negotiation period of sixty (60) days followed by litigation in the federal or state court encompassing Santa Clara County, California, in the case of claimants who are U.S. residents, or, in the case of all other claimants, arbitration administered by the International Chamber of Commerce (“ICC”) in accordance with the ICC Rules of Conciliation and Arbitration, unless otherwise approved by Symantec.

9.14 Governing Law

Subject to any limits appearing in applicable law, the laws of the State of California, U.S.A., shall govern the enforceability, construction, interpretation, and validity of this CP, irrespective of contract or other choice of law provisions and without the requirement to establish a commercial nexus in California, USA. This choice of law is made to ensure uniform procedures and interpretation for all STN Participants, no matter where they are located.

This governing law provision applies only to this CP. Agreements incorporating the CP by reference may have their own governing law provisions, provided that this Section 9.14 governs the enforceability, construction, interpretation, and validity of the terms of the CP separate and apart from the remaining provisions of any such agreements, subject to any limitations appearing in applicable law.

This CP is subject to applicable national, state, local and foreign laws, rules, regulations, ordinances, decrees, and orders including, but not limited to, restrictions on exporting or importing software, hardware, or technical information.

9.15 Compliance with Applicable Law

This CP is subject to applicable national, state, local and foreign laws, rules, regulations, ordinances, decrees, and orders including, but not limited to, restrictions on exporting or importing software, hardware, or technical information.

9.16 Miscellaneous Provisions

9.16.1 Entire Agreement

Not applicable

9.16.2 Assignment

Not applicable

9.16.3 Severability

In the event that a clause or provision of this CP is held to be unenforceable by a court of law or other tribunal having authority, the remainder of the CP shall remain valid.

9.16.4 Enforcement (Attorney's Fees and Waiver of Rights)

Not applicable

9.16.5 Force Majeure

To the extent permitted by applicable law, Subscriber Agreements and Relying Party Agreements shall include a force majeure clause protecting Symantec and the applicable Affiliate.

9.17 Other Provisions

Not applicable

Appendix A. Table of Acronyms and Definitions

Table of Acronyms

Term	Definition
ANSI	The American National Standards Institute.
ACS	Authenticated Content Signing.
BIS	The United States Bureau of Industry and Science of the United States Department of Commerce.
CA	Certification Authority.
CP	Certificate Policy.
CPS	Certification Practice Statement.
CRL	Certificate Revocation List.
EV	Extended Validation
FIPS	United State Federal Information Processing Standards.
ICC	International Chamber of Commerce.
KRB	Key Recovery Block.
LSVA	Logical security vulnerability assessment.
OCSP	Online Certificate Status Protocol.
PCA	Primary Certification Authority.
PIN	Personal identification number.
PKCS	Public-Key Cryptography Standard.
PKI	Public Key Infrastructure.
PMA	Policy Management Authority.
RA	Registration Authority.
RFC	Request for comment.
SAR	Security Audit Requirements
S/MIME	Secure multipurpose Internet mail extensions.
SOC	Service Organization Control standard (promulgated by the American Institute of Certified Public Accountants).
SSL	Secure Sockets Layer.
STN	Symantec Trust Network.

Definitions

Term	Definition
Administrator	A Trusted Person within the organization of a Processing Center, Service Center, Managed PKI Customer, or Gateway Customer that performs validation and other CA or RA functions.
Administrator Certificate	A Certificate issued to an Administrator that may only be used to perform CA or RA functions.
Affiliate	A leading trusted third party, for example in the technology, telecommunications, or financial services industry, that has entered into an agreement with Symantec to be a STN distribution and services channel within a specific territory.
Affiliate Practices Legal Requirements Guidebook	A Symantec document setting forth requirements for Affiliate CPSes, agreements, validation procedures, and privacy policies, as well as other requirements that Affiliates must meet.
Affiliated Individual	A natural person that is related to a Managed PKI Customer, Managed PKI Lite Customer, or Gateway Customer entity (i) as an officer, director, employee, partner, contractor, intern, or other person within the entity, (ii) as a member of a Symantec registered community of interest, or (iii) as a person maintaining a relationship with the entity where the entity has business or other records providing appropriate assurances of the identity of such person.
Automated Administration	A procedure whereby Certificate Applications are approved automatically if enrollment information matches information contained in a database.
Automated Administration Software Module	Software provided by Symantec that performs Automated Administration.
Certificate	A message that, at least, states a name or identifies the CA, identifies the Subscriber, contains the Subscriber's public key, identifies the Certificate's Operational Period, contains a Certificate serial number, and is digitally signed by the CA.
Certificate Applicant	An individual or organization that requests the issuance of a Certificate by a CA.
Certificate Application	A request from a Certificate Applicant (or authorized agent of the Certificate Applicant) to a CA for the issuance of a Certificate.
Certificate Chain	An ordered list of Certificates containing an end-user Subscriber Certificate and CA Certificates, which terminates in a root Certificate.

Term	Definition
Certificate Management Control Objectives	Criteria that an entity must meet in order to satisfy a Compliance Audit.
Certificate Policies (CP)	This document, which is entitled "Symantec Trust Network Certificate Policies" and is the principal statement of policy governing the STN.
Certificate Revocation List (CRL)	A periodically (or exigently) issued list, digitally signed by a CA, of identified Certificates that have been revoked prior to their expiration dates in accordance with CP § 3.4. The list generally indicates the CRL issuer's name, the date of issue, the date of the next scheduled CRL issue, the revoked Certificates' serial numbers, and the specific times and reasons for revocation.
Certificate Signing Request	A message conveying a request to have a Certificate issued.
Certification Authority (CA)	An entity authorized to issue, manage, revoke, and renew Certificates in the STN.
Certification Practice Statement (CPS)	A statement of the practices that Symantec or an Affiliate employs in approving or rejecting Certificate Applications and issuing, managing, and revoking Certificates, and requires its Managed PKI Customers and Gateway Customers to employ.
Challenge Phrase	A secret phrase chosen by a Certificate Applicant during enrollment for a Certificate. When issued a Certificate, the Certificate Applicant becomes a Subscriber and a CA or RA can use the Challenge Phrase to authenticate the Subscriber when the Subscriber seeks to revoke or renew the Subscriber's Certificate.
Class	A specified level of assurances as defined within the CP. See CP § 1.1.1.
Client Service Center	A Service Center that is an Affiliate providing client Certificates either in the Consumer or Enterprise line of business.
Compliance Audit	A periodic audit that a Processing Center, Service Center, Managed PKI Customer, or Gateway Customer undergoes to determine its conformance with STN Standards that apply to it.
Compromise	A violation (or suspected violation) of a security policy, in which an unauthorized disclosure of, or loss of control over, sensitive information may have occurred. With respect to private keys, a Compromise is a loss, theft, disclosure, modification, unauthorized use, or other compromise of the security of such private key.
Confidential/Private Information	Information required to be kept confidential and private pursuant to CP § 2.8.1.
CRL Usage Agreement	An agreement setting forth the terms and conditions under which a CRL or the information in it can be used.
Customer	An organization that is either a Managed PKI Customer, Gateway Customer, or ASB Customer.
Enterprise, as in Enterprise Service Center	A line of business that an Affiliate enters to provide Managed PKI services to Managed PKI Customers.
EV Certificate	A digital certificate that contains information specified in the EV Guidelines and that has been validated in accordance with the Guidelines
Exigent Audit/Investigation	An audit or investigation by Symantec where Symantec has reason to believe that an entity's failure to meet STN Standards, an incident or Compromise relating to the entity, or an actual or potential threat to the security of the STN posed by the entity has occurred.
Extended Validation	Validation Procedures defined by the Guidelines for Extended Validation Certificates published by a forum consisting of major certification authorities and browser vendors.
Intellectual Property Rights	Rights under one or more of the following: any copyright, patent, trade secret, trademark, and any other intellectual property rights.
Intermediate Certification Authority (Intermediate CA)	A Certification Authority whose Certificate is located within a Certificate Chain between the Certificate of the root CA and the Certificate of the Certification Authority that issued the end-user Subscriber's Certificate.
Key Generation Ceremony	A procedure whereby a CA's or RA's key pair is generated, its private key is transferred into a cryptographic module, its private key is backed up, and/or its public key is certified.
Key Manager Administrator	An Administrator that performs key generation and recovery functions for a Managed PKI Customer using Managed PKI Key Manager.
Key Recovery Block (KRB)	A data structure containing a Subscriber's private key that is encrypted using an encryption key. KRBs are generated using Managed PKI Key Manager software.
Key Recovery Service	A Symantec service that provides encryption keys needed to recover a Key Recovery Block as part of a Managed PKI Customer's use of Managed PKI Key Manager to recover a Subscriber's private key.
Managed PKI	Symantec's fully integrated managed PKI service that allows enterprise Customers of Symantec and its Affiliates to distribute Certificates to individuals, such as employees, partners, suppliers, and customers, as well as devices, such as servers, routers, and firewalls. Managed PKI permits enterprises to secure messaging, intranet, extranet, virtual private network, and e-commerce applications.
Managed PKI Administrator	An Administrator that performs validation or other RA functions for a Managed PKI Customer.
Managed PKI Control Center	A web-based interface that permits Managed PKI Administrators to perform Manual Authentication of Certificate Applications
Managed PKI Key Manager	A key recovery solution for those Managed PKI Customers choosing to implement key recovery under

Term	Definition
	a special Managed PKI Agreement.
Managed PKI Key Management Service Administrator's Guide	A document setting forth the operational requirements and practices for Managed PKI Customers using Managed PKI Key Manager.
Manual Authentication	A procedure whereby Certificate Applications are reviewed and approved manually one-by-one by an Administrator using a web-based interface.
NetSure Protection Plan	An extended warranty program, which is described in CP §9.2.3.
Non-verified Subscriber Information	Information submitted by a Certificate Applicant to a CA or RA, and included within a Certificate, that has not been confirmed by the CA or RA and for which the applicable CA and RA provide no assurances other than that the information was submitted by the Certificate Applicant.
Non-repudiation	An attribute of a communication that provides protection against a party to a communication falsely denying its origin, denying that it was submitted, or denying its delivery. Denial of origin includes the denial that a communication originated from the same source as a sequence of one or more prior messages, even if the identity associated with the sender is unknown. Note: only an adjudication by a court, arbitration panel, or other tribunal can ultimately prevent repudiation. For example, a digital signature verified with reference to a STN Certificate may provide proof in support of a determination of Non-repudiation by a tribunal, but does not by itself constitute Non-repudiation.
Offline CA	STN PCAs, Issuing Root CAs and other designated intermediate CAs that are maintained offline for security reasons in order to protect them from possible attacks by intruders by way of the network. These CAs do not directly sign end user Subscriber Certificates.
Online CA	CAs that sign end user Subscriber Certificates are maintained online so as to provide continuous signing services.
Online Certificate Status Protocol (OCSP)	A protocol for providing Relying Parties with real-time Certificate status information.
Operational Period	The period starting with the date and time a Certificate is issued (or on a later date and time certain if stated in the Certificate) and ending with the date and time on which the Certificate expires or is earlier revoked.
PKCS #10	Public-Key Cryptography Standard #10, developed by RSA Security Inc., which defines a structure for a Certificate Signing Request.
PKCS #12	Public-Key Cryptography Standard #12, developed by RSA Security Inc., which defines a secure means for the transfer of private keys.
Policy Management Authority (PMA)	The organization within Symantec responsible for promulgating this policy throughout the STN.
Primary Certification Authority (PCA)	A CA that acts as a root CA for a specific Class of Certificates, and issues Certificates to CAs subordinate to it.
Processing Center	An organization (Symantec or certain Affiliates) that creates a secure facility housing, among other things, the cryptographic modules used for the issuance of Certificates. In the Consumer and Web Site lines of business, Processing Centers act as CAs within the STN and perform all Certificate lifecycle services of issuing, managing, revoking, and renewing Certificates. In the Enterprise line of business, Processing Centers provide lifecycle services on behalf of their Managed PKI Customers or the Managed PKI Customers of the Service Centers subordinate to them.
Public Key Infrastructure (PKI)	The architecture, organization, techniques, practices, and procedures that collectively support the implementation and operation of a Certificate-based public key cryptographic system. The STN PKI consists of systems that collaborate to provide and implement the STN.
Registration Authority (RA)	An entity approved by a CA to assist Certificate Applicants in applying for Certificates, and to approve or reject Certificate Applications, revoke Certificates, or renew Certificates.
Relying Party	An individual or organization that acts in reliance on a certificate and/or a digital signature.
Relying Party Agreement	An agreement used by a CA setting forth the terms and conditions under which an individual or organization acts as a Relying Party.
Reseller	An entity marketing services on behalf of Symantec or an Affiliate to specific markets.
Retail Certificate	A Certificate issued by Symantec or an Affiliate, acting as CA, to individuals or organizations applying one by one to Symantec or an Affiliate on its web site.
RSA	A public key cryptographic system invented by Rivest, Shamir, and Adelman.
RSA Secure Server CA	The Certification Authority that issues Secure Server IDs.
RSA Secure Server Hierarchy	The PKI hierarchy comprised of the RSA Secure Server Certification Authority.
Secret Share	A portion of a CA private key or a portion of the activation data needed to operate a CA private key under a Secret Sharing arrangement.
Secret Sharing	The practice of splitting a CA private key or the activation data to operate a CA private key in order to enforce multi-person control over CA private key operations under CP § 6.2.2.
Secure Server ID	A Class 3 organizational Certificate used to support SSL sessions between web browsers and web servers.

Term	Definition
Secure Sockets Layer (SSL)	The industry-standard method for protecting Web communications developed by Netscape Communications Corporation. The SSL security protocol provides data encryption, server authentication, message integrity, and optional client authentication for a Transmission Control Protocol/Internet Protocol connection.
Security and Audit Requirements Guide	A Symantec document that sets forth the security and audit requirements and practices for Processing Centers and Service Centers.
Security and Practices Review	A review of an Affiliate performed by Symantec before an Affiliate is permitted to become operational.
Service Center	An Affiliate that does not house Certificate signing units for the issuance of Certificates for the purpose of issuing Certificates of a specific Class or type, but rather relies on a Processing Center to perform issuance, management, revocation, and renewal of such Certificates.
Sub-domain	The portion of the STN under control of an entity and all entities subordinate to it within the STN hierarchy.
Subject	The holder of a private key corresponding to a public key. The term "Subject" can, in the case of an organizational Certificate, refer to the equipment or device that holds a private key. A Subject is assigned an unambiguous name, which is bound to the public key contained in the Subject's Certificate.
Subscriber	In the case of an individual Certificate, a person who is the Subject of, and has been issued, a Certificate. In the case of an organizational Certificate, an organization that owns the equipment or device that is the Subject of, and that has been issued, a Certificate. A Subscriber is capable of using, and is authorized to use, the private key that corresponds to the public key listed in the Certificate.
Subscriber Agreement	An agreement used by a CA or RA setting forth the terms and conditions under which an individual or organization acts as a Subscriber.
Superior Entity	An entity above a certain entity within a STN hierarchy (the Class 1, 2, or 3 hierarchy).
Supplemental Risk Management Review	A review of an entity by Symantec following incomplete or exceptional findings in a Compliance Audit of the entity or as part of the overall risk management process in the ordinary course of business.
Symantec	Means, with respect to each pertinent portion of this CPS, Symantec Corporation and/or any wholly owned Symantec subsidiary responsible for the specific operations at issue.
Symantec Digital Notarization Service	A service offered to Managed PKI Customers that provides a digitally signed assertion (a Digital Receipt) that a particular document or set of data existed at a particular point in time.
Symantec Repository	Symantec's database of Certificates and other relevant Symantec Trust Network information accessible on-line.
Trusted Person	An employee, contractor, or consultant of an entity within the STN responsible for managing infrastructural trustworthiness of the entity, its products, its services, its facilities, and/or its practices as further defined in CP § 5.2.1.
Trusted Position	The positions within a STN entity that must be held by a Trusted Person.
Trustworthy System	Computer hardware, software, and procedures that are reasonably secure from intrusion and misuse; provide a reasonable level of availability, reliability, and correct operation; are reasonably suited to performing their intended functions; and enforce the applicable security policy. A trustworthy system is not necessarily a "trusted system" as recognized in classified government nomenclature.
Symantec Trust Network (STN)	The Certificate-based Public Key Infrastructure governed by the Symantec Trust Network Certificate Policies, which enables the worldwide deployment and use of Certificates by Symantec and its Affiliates, and their respective Customers, Subscribers, and Relying Parties.
STN Participant	An individual or organization that is one or more of the following within the STN: Symantec, an Affiliate, a Customer, a Universal Service Center, a Reseller, a Subscriber, or a Relying Party.
STN Standards	The business, legal, and technical requirements for issuing, managing, revoking, renewing, and using Certificates within the STN.

Appendix B

History of Changes

History of changes: version 2.8.5

Description	Section & Changes made
Transition from VeriSign to Symantec including: naming, URLs, email addresses.	Throughout document, Naming: VeriSign Inc to Symantec Corporation VeriSign Trust Network(VTN) to Symantec Trust Network (STN) URLs: from verisign.com to symauth.com Email address: from verisign.com to symantec.com
Correction to URL for Managed PKI Lite CRLs.	Section 4.9.6 Changed http://onsitecrl.verisign.com/OnSitePublic/ to http://onsitecrl.verisign.com/OnSitePublic/LatestCRL-G2.crl .
Elimination of the self-revoke webpage in the Magnum release.	Section 3.4. Having the Subscriber for certain certificate types submit the Subscriber's Challenge Phrase (or the equivalent thereof), and revoking the Certificate automatically if it matches the Challenge Phrase (or the equivalent thereof) on record. <u>(Note that this option may not be available to all customers.)</u> Section 4.9.2 Individual Subscribers can request the revocation of their own individual Certificates through an authorized representative of Symantec or an RA.
Clarified the conditions for revoking the recovered key.	Section 4.12.1 Revoke the Subscriber's Key pair prior to recovering the encryption key under certain circumstances such as to discontinue the use of a lost certificate.
Individuals may be assigned to Trusted Roles from the QA & Sales teams solely for approved internal functions within Symantec Corp.	Section 5.2.1 new footnote: Trusted Roles include, but are not limited to ¹⁰ ¹⁰For certain approved internal functions Symantec Corporation may identify individuals in the Quality Assurance (QA) and Sales teams as Trusted Roles limited to internal RA functions. Such assigned individuals shall receive training specific to the internal RA functions in accordance with section 5.3.3.
RAs from the QA & Sales teams may operate without the physical & monitoring protections designated for RAs. Cert issuance is restricted to Class 2 certificates containing an OU value indicating the inherent lack of trust in the cert.	Section 5.1.1 new footnote: RAs processing or issuing Class 1 or Class 2 certificates are required to implement a level of security appropriate to the specific class of certificate ¹¹ . ¹¹For certain approved internal uses, Symantec RAs operating with a Class 3 certificate containing the Symantec organization name in the DN may perform RA operations with less than Class 3 physical security and monitoring. Certificate issuance under such RA operating protections shall be restricted to Class 2 certificates containing an OU value reflecting the inherent lack of trust in the certificate.
Class 2 certs may be issued under certain approved internal uses without identity validation	Section 3.1.1 new footnote: Common names shall be authenticated in the case of Class 2-3 Certificates ⁵ ⁵For certain approved internal uses within Symantec Corporation Class 2 certificates may be issued without identity authentication. Such certificates shall contain the Symantec organization name in the DN as well an OU value reflecting the lack of trust in the Subscriber identity. Personnel required to use such certificates shall receive training specific to user responsibilities.
Stipulate the period of usage of CL2 test & demo certificates issued for the Symantec internal accounts.	Section 4.9.1 In the case of Class 2 certificates issued for internal Symantec test or demo purposes, the certificate shall be revoked after 90 days.
Removed the statement on EAL-4 certification of the PC software.	Section 6.5.2 Specific security sensitive areas of the CA and RA functionality of Symantec-supplied software shall meet the assurance requirements of EAL-3 (Common Criteria for Information Technology Security Evaluation, v-2.1, Aug. 1999). No stipulation.
Correction to URL for Managed PKI Lite CRLs	Section 4.9.6 Changed http://onsitecrl.verisign.com/OnSitePublic/ to http://onsitecrl.verisign.com/OnSitePublic/LatestCRL-G2.crl .
Tables re Key Usage and	Section 7.1.2.1

Description	Section & Changes made
EKU are removed because data is outdated and is not necessary to publish	Table 6 is removed as well as the sentence introducing the table. Section 7.1.2.5 Table 7 is removed as well as the sentence introducing the table.
Change to BasicConstraints setting for Subscriber certs.	Section 7.1.2.4. End-user Subscriber Certificates BasicConstraints extension <u>shall have the CA field set to FALSE shall be populated with a value of an empty sequence.</u> The criticality field of this extension shall be set to TRUE for CA Certificates, but <u>otherwise set to false may be set to TRUE or FALSE for end-user Subscriber Certificates.</u>
Section 8.4 & Appendix A Reflect the AICPA change from SAS/70 to the SOC standard as documented in www.aicpa.org/soc .	Section 8.4 Institute of Certificate Public Accounts' Statement on <u>Auditing Standards (SAS) Number 70 Service Organizations Control (SOC)</u> Reports on the <u>Processing of Transactions by risks associated with Service Organizations.</u> Appendix A Replaced the Acronym SAS/70 with SOC.

History of changes: version 2.8.4

Description	Section & Changes made				
Exception for excluding email address in <i>subjAltName</i> for Public Lite accounts	Section 7.1.2.3 The subjectAltName extension of X.509 Version 3 Certificates are populated in accordance with RFC 5280 <u>with the exception of those issued under Public Lite accounts which may optionally exclude the email address in SubjAltName.</u> The criticality field of this extension shall be set to FALSE.				
Updated policy to delete all descriptions of the planned transition on or before 31 Dec 2010. Added individual exceptions identified in footnote.	6.1.5 Key Sizes The Symantec Standard for minimum key sizes is the use of key pairs equivalent in strength to 2048 bit RSA for PCAs and CAs ¹¹ . Symantec <u>recommends the use of issues</u> a minimum key size equivalent in strength to 2048 bit RSA for RAs and end entity certificates key pairs. <u>Symantec will continue to approve certain end entity certificates generated with a key pair size of less than 2048 bit RSA but will phase out all 1024-bit RSA by December 31, 2013.</u> Symantec recommends the use of a minimum key size equivalent in strength to 256 bit ECC for PCA, CA, Registration Authority and end entity certificate key pairs. Footnote added: ¹¹ <u>Symantec may retain legacy Trusted Roots with 1024 bit RSA key pairs for support of customer legacy platforms for issuance of 1024-bit RSA end-entity certificates for a limited period.</u>				
Changes for Auto-Renew 6-year certificate lifetimes and 6-year certificate lifetimes for Enterprise & Client PKI:					
2 new conditions for cert revocation for Auto-Renew process.	Section 4.9.1 An end-user Subscriber Certificate is revoked if... (2 bullets added) <ul style="list-style-type: none"> <u>The Subscriber identity has not been successfully re-verified in accordance with section 6.3.2,</u> <u>The Subscriber has not submitted payment when due,</u> 				
The online issuing CA of 6-year certificates must have 10-yr validity period. CAs with 10-year lifetimes must be re-keyed after 5 years.	Section 6.3.2, in Table 4 & footnote #13 <table border="1" data-bbox="527 1386 1312 1465"> <thead> <tr> <th>Certificate Issued By:</th> <th>Validity Period:</th> </tr> </thead> <tbody> <tr> <td>Offline intermediate CA to online CA</td> <td>Generally 5 years but up to 10 years after renewal¹³</td> </tr> </tbody> </table> ¹³ If <u>6 5-year</u> end-user subscriber certificates are issued, the online CA certificate's operational period will be 10 years with no option to renew. <u>CA</u> re-key will be required after 5 years.	Certificate Issued By:	Validity Period:	Offline intermediate CA to online CA	Generally 5 years but up to 10 years after renewal ¹³
Certificate Issued By:	Validity Period:				
Offline intermediate CA to online CA	Generally 5 years but up to 10 years after renewal ¹³				
Re-enrollment of the End entity certificate is required at end of a 6-yr certificate validity period. CAs with 10-year lifetimes must be re-keyed after 5 years.	In Table 4 & footnote #14 <table border="1" data-bbox="527 1554 1312 1680"> <thead> <tr> <th>Certificate Issued By:</th> <th>Validity Period:</th> </tr> </thead> <tbody> <tr> <td>Online CA to End-user Individual Subscriber</td> <td>Normally up to 2 years, but under the conditions described below, up to <u>6 5 years</u>¹⁴ <u>under the conditions described below with no option to renew or re-key. After 6 years new enrollment is required.</u></td> </tr> </tbody> </table> ¹⁴ If <u>6 5-year</u> end-user subscriber certificates are issued, the online CA certificate's operational period will be 10 years with no option to renew. <u>CA</u> re-key will be required after 5 years.	Certificate Issued By:	Validity Period:	Online CA to End-user Individual Subscriber	Normally up to 2 years, but under the conditions described below, up to <u>6 5 years</u> ¹⁴ <u>under the conditions described below with no option to renew or re-key. After 6 years new enrollment is required.</u>
Certificate Issued By:	Validity Period:				
Online CA to End-user Individual Subscriber	Normally up to 2 years, but under the conditions described below, up to <u>6 5 years</u> ¹⁴ <u>under the conditions described below with no option to renew or re-key. After 6 years new enrollment is required.</u>				
Certificates with 6-yr lifetime must be re-verified after 3 years.	Section 6.3.2 in Table 4 & footnote #15 <table border="1" data-bbox="527 1768 1312 1896"> <thead> <tr> <th>Certificate Issued By:</th> <th>Validity Period:</th> </tr> </thead> <tbody> <tr> <td>Online CA to End-user Organizational Subscriber</td> <td>Normally up to 3 years.¹⁵ NOTE: SSL certificates may be valid for up to <u>6 5</u> years. At a minimum, the Distinguished Name of <u>4 and 5-year validity</u> SSL certificates <u>with validity of</u></td> </tr> </tbody> </table>	Certificate Issued By:	Validity Period:	Online CA to End-user Organizational Subscriber	Normally up to 3 years. ¹⁵ NOTE: SSL certificates may be valid for up to <u>6 5</u> years. At a minimum, the Distinguished Name of <u>4 and 5-year validity</u> SSL certificates <u>with validity of</u>
Certificate Issued By:	Validity Period:				
Online CA to End-user Organizational Subscriber	Normally up to 3 years. ¹⁵ NOTE: SSL certificates may be valid for up to <u>6 5</u> years. At a minimum, the Distinguished Name of <u>4 and 5-year validity</u> SSL certificates <u>with validity of</u>				

Description	Section & Changes made		
	<table border="1"> <tr> <td></td> <td><u>more than 3 years</u> is re-verified after three years from date of certificate issuance.</td> </tr> </table> <p>¹⁵ Organizational end-entity certificates used solely to support the operation of a portion of the <u>VTN/STN</u> may be issued with a validity period of <u>6 5</u> years and up to a maximum of 10 years after renewal.</p>		<u>more than 3 years</u> is re-verified after three years from date of certificate issuance.
	<u>more than 3 years</u> is re-verified after three years from date of certificate issuance.		
Clarify restrictions that are applicable to Certificates issued with 6-year lifetimes	<p>Section 6.3.2</p> <p>Certificates issued by CAs to end-user Subscribers may have Operational Periods longer than two years, up to <u>five six</u> years, if the following requirements are met:</p> <ul style="list-style-type: none"> • The Certificates are individual Certificates, • <u>Protection of the Subscriber key pairs in relation to its operational environment for Organization Certificates, operation with the enhanced protection of a data center and for Individual Certificates,</u> the Subscribers' key pairs reside on a hardware token, such as a smart card, • Subscribers are required to undergo re-authentication at least every <u>3 years 25 months</u> under Section 3.2.3, • Subscribers shall prove possession of the private key corresponding to the public key within the Certificate at least every 25 months under Section 3.2.3, • If a Subscriber is unable to complete re-authentication procedures successfully or is unable to prove possession of such private key when required by the foregoing, the CA shall revoke the Subscriber's Certificate. 		

History of changes: version 2.8.3

Description	Section & Changes made
Updated Trademarks Notices page & added Acquisition Notice.	Page ii.
Changes to identify Symantec Corporation acquisition & ownership of the VTN CA services.	Throughout document: <ul style="list-style-type: none"> • Corporate owner & contact information changed to Symantec Corporation • CA names and VTN branding continues to reflect the VeriSign name until such time that re-branding can occur.
Changes to Governing Law in accord with Symantec ownership	Section 9.14, 9.13.2
Removed VeriSign Roaming Services which is EOL.	Sections 6.1.2, 6.2.4, 6.2.8.2, 6.2.8.3 & Appendix A
Removed reference to Certificate Interoperability Service (CIS) which is EOL	Section 3.2.6 footnote
Clarification of TGV services	Section 7.3
Clarified Symantec approval required for exceptions to certificate validity periods.	Section 6.3.2, footnote#12.

History of changes: version 2.8.2

Description	Section & Changes made
Changes to describe CA transitions, Key Sizes & Universal Roots	<p>1.3.1 Certificate Authorities</p> <p>VeriSign also operates the "VeriSign Universal Root Certification Authority" <u>and the "VeriSign ECC Universal Root Certification Authority"</u>. The VeriSign Universal Root <u>CAs are Certification Authority is</u> not defined under a particular certificate Class, and may issue any class of Subordinate CA.</p>
<p><u>RSA:</u></p> <ul style="list-style-type: none"> • Roots & CAs are transitioning to 2048 as of 31 Dec 2013. • EV certs are transitioning to 2048 as of 31 Dec 2010. • RAs & EE are recommended to generate 2048 but 1024 will continue to be approved. But <u>all</u> 1024 RSA will phased out by 31 	<p>6.1.5 Key Sizes</p> <p>Key pairs shall be of sufficient length to prevent others from determining the key pair's private key using cryptanalysis during the period of expected utilization of such key pairs. The <u>current</u> VTN Standard for minimum key sizes is the use of key pairs equivalent in strength to <u>40242048</u> bit RSA for PCAs and CAs.</p> <p>VeriSign recommends the use of a minimum key size equivalent in strength to <u>40242048</u> bit RSA for <u>RAs and</u> end entity certificates key pairs. VeriSign may not <u>VeriSign will continue to approve certain end entity certificates generated with a key pair size of 512-bit or less less than 2048 bit RSA but will phase out all 1024-bit RSA by December 31, 2013.</u></p> <p><u>VeriSign recommends the use of a minimum key size equivalent in strength to 256 bit ECC for PCA, CA, Registration Authority and end entity certificate key pairs.</u></p>

Description	Section & Changes made
<p>Dec 2013.</p> <p><u>ECC:</u></p> <ul style="list-style-type: none"> 384 bit ECC CL3PCA-G4 is the Universal Root. <p><u>Algorithms:</u></p> <ul style="list-style-type: none"> -Sha1&256 with RSA -Sha256&384 with ECC -md5 only under prior agreement -No md2 	<p><u>The VTN Standard for digital signature hash algorithm is the use of either SHA-1 or SHA-2.</u></p> <p>6.3.2 Certificate Operational Periods & Key Pair Usage Periods</p> <p><u>Table 4:</u></p> <p>PCA self-signed (1024 bit <u>RSA</u>) - Up to 30 years PCA self-signed (1024 bit <u>RSA</u>) - Up to 30 years <u>PCA self-signed (256 bit ECC) - Up to 30 years</u> <u>PCA self-signed (384 bit ECC) - Up to 30 years</u></p> <p>7.1.3 Algorithm Object Identifiers</p> <ul style="list-style-type: none"> <u>sha256withRSAEncryption</u> OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) rsdsi(113549) pkcs(1) pkcs-1(1) 11} <u>ecdsa-with-Sha256</u> OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) ansi-X9-62(10045) signatures(4) ecdsa-with-SHA2 (3) 2} <u>ecdsa-with-Sha384</u> OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) ansi-X9-62(10045) signatures(4) ecdsa-with-SHA2 (3) 3} <u>sha-1WithRSAEncryption</u> OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) rsdsi(113549) pkcs(1) pkcs-1(1) 5} <u>md5WithRSAEncryption</u> OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) rsdsi(113549) pkcs(1) pkcs-1(1) 4} <u>md2WithRSAEncryption</u> OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) rsdsi(113549) pkcs(1) pkcs-1(1) 2} <p><u>Either sha-1WithRSAEncryption or sha-256WithRSAEncryption shall be given strong preference is used over md5WithRSAEncryption. ** md2WithRSAEncryption is no longer used to sign end entity certificates, but is used to sign CRLs for certain legacy CA and End-User-Subscriber Certificates.</u></p> <p>Footnote added: <u>**md5WithRSAEncryption is used only with prior approval to preserve business continuity of legacy applications.</u></p> <p>7.2 CRL Profile</p> <p>Signature Algorithm - Algorithm used to sign the CRL. <u>VeriSign CRLs are signed using the sha-1WithRSAEncryption (OID: 1.2.840.113549.1.1.5) or md5WithRSAEncryption (OID: 1.2.840.113549.1.1.4) in accordance with RFC 3279. (See CP § 7.1.3)</u></p>
<p>Remote Hosted KMS – provides option for customer to host the KMS & KMD on their own premises.</p>	<p>4.12 Key Escrow and Recovery</p> <p>Enterprise customers using Managed PKI Key Management Service (<u>KMS</u>) can escrow copies of the private keys of Subscribers whose Certificate Applications they approve. <u>The enterprise customer may use KMS operated either out of the enterprise's premises or VeriSign's secure data center. If operated out of the enterprise's premises, VeriSign does not store copies of Subscriber private keys but nevertheless plays an important role in the Subscriber key recovery process.</u></p> <p>4.12.2 Session Key Encapsulation and Recovery Policy Practices</p> <p>Private keys are stored <u>in the Key Manager database on the enterprise' premises</u> in encrypted form. Each Subscriber's private key is individually encrypted with its own triple-DES symmetric key. A Key Escrow Record (KER) is generated, then the triple-DES key is combined with a random session key <u>to form a session key mask (MSK) generated in hardware and destroyed. Only the resulting masked-session key (MSK) together with the certificate request information</u> is securely sent and stored <u>in the Managed PKI database</u> at VeriSign. The KER (containing the end user's private key) <u>and the individual random-session key mask</u> are stored in the Key Manager database <u>on the enterprise' premises.</u></p> <p><u>The Managed PKI database is operated out of VeriSign's secure data center. The enterprise customer may choose to operate the Key Manager database either on the enterprise's premises or out of VeriSign's secure data center.</u></p> <p>Recovery of a private key and digital certificate requires the Managed PKI administrator to securely log on to the Managed PKI Control Center, select the appropriate key pair to recover and click a "recover" hyperlink. Only after an approved administrator clicks the "recover" link is the MSK for that key pair returned from the Managed PKI database <u>operated-out-of VeriSign's secure data-center.</u> The Key Manager <u>retrieves the session key from the KMD and combines it with the MSK to combine the MSK with the random session key mask and regenerates</u> the triple-DES key which was used to originally encrypt the private key, allowing recovery of the end user's private key. As a final step, an encrypted PKCS#12 file is returned to the administrator and ultimately distributed to the end user.</p> <p>5.2.2 Number of Persons Required per Task</p> <p>Other manual operations such as the validation and issuance of Class 3 Certificates, not issued by an automated validation and issuance system, require the participation of at least 2 Trusted Persons, or a combination of at least one trusted person and an automated validation</p>

Description	Section & Changes made
	and issuance process. Manual operations for Key Recovery may optionally require the validation of two (2) authorized Administrators.
	5.2.4 Roles Requiring Separation of Duties Roles requiring Separation of duties include (but are not limited to) <ul style="list-style-type: none"> the validation of information in Certificate Applications; the acceptance, rejection, or other processing of Certificate Applications, revocation requests, recovery requests or renewal requests, or enrollment information;
Correction to ID Proofing of Class 3 Administrator (need not be employees)	3.2.3 Auth of Individual Identity Class 3 Administrator certificates shall also include authentication of the organization and a confirmation from the organization of the identity employment and authorization of the person to act as Administrator. Footnote #5: Confirmation of the identity employment and authorization of the person enrolling for the Administrator certificate for the service named as Administrator in the Certificate Application.

History of changes version 2.8.1

Section	Description
Section 1.2	Deleted: "VeriSign Trust Network Shared Service Provider for non federal entities Policy: id-vtn-ssp OBJECT IDENTIFIER ::= {id-vtn id-vtn-ssp(7)} (2.16.840.1.113733.1.7.23.7)" Added: "Each OID above may be extended further to define additional policies covering a particular type of certificate. The extended OID SHALL be defined in the particular CPS for that product. For example, a non-Federal SSP certificate issued under the VTN at the Basic level has a Class 2 OID defined in the VeriSign non-Federal SSP CPS as follows, 2.16.840.1.113733.1.7.23.2.5."
Section 6.1.4	Added Footnote: "1 The VeriSign Class 1 PCA used to support rudimentary non-federal SSP certificates is not generally distributed and is only made available to VeriSign non-federal SSP customers "
Throughout CP	Replaced all references to RFC 3280 with RFC 5280

History of changes version 2.8

Section	Description
Section 6.3.2 – Table 4	Added: "NOTE: SSL certificates may be valid for up to 5 years. At a minimum, the Distinguished Name of 4 and 5 year validity SSL certificates is reverified after three years from date of certificate issuance"

History of changes version 2.7

Section	Description
Section 1.3.1	Added: "VeriSign also operates the "VeriSign Universal Root Certification Authority". The "VeriSign Universal Root Certification Authority" is not defined under a particular certificate Class, and may issue any class of Subordinate CA."
Section 6.3.2	Added Footnote: "1 Certificate validity periods may be extended beyond the limits set in Section 6.3.2 for certificates using stronger encryption algorithms or key lengths are used, e.g. the use of SHA 2 or ECC algorithms and/or the use of 2048 bit or larger keys."
Section 7.1.3	Added two algorithms: 1. sha256withRSAEncryption OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) rsadsi(113549) pkcs(1) pkcs-1(1) 11} 2. ecdsa-with-Sha384 OBJECT IDENTIFIER ::= {iso(1) member-body(2) us(840) ansi-X9-62(10045) signatures(4) ecdsa-with-SHA2 (3) 3}

History of changes: version 2.6

Section	Description
Section 4.1.2.1	Changed "demonstrating possession of the private key corresponding to the public key delivered to VeriSign." to "demonstrating possession and/or exclusive control of the private key corresponding to the public key delivered to VeriSign."

Section 7.1	Update " VTN Certificates conform to (a) ITU-T Recommendation X.509 (1997): Information Technology - Open Systems Interconnection - The Directory: Authentication Framework, June 1997 and (b) RFC 5280: Internet X.509 Public Key Infrastructure Certificate and CRL Profile, April 2002 ("RFC 5280"). ." To " VTN Certificates generally conform to (a) ITU-T Recommendation X.509 (1997): Information Technology - Open Systems Interconnection - The Directory: Authentication Framework, June 1997 and (b) RFC 5280: Internet X.509 Public Key Infrastructure Certificate and CRL Profile, April 2002 ("RFC 5280"). ."
Section 7.1.2.1	Deleted "Although the nonRepudiation bit is not set in the KeyUsage extension, the VTN nonetheless supports nonrepudiation services for these Certificates. The nonRepudiation bit is not required to be set in these Certificates because the PKI industry has not reached a consensus as to what the nonRepudiation bit means. Until such a consensus emerges, the nonRepudiation bit will not be meaningful for potential Relying Parties. Moreover, the most commonly used applications do not recognize the nonRepudiation bit. Therefore, setting the bit will not help Relying Parties make a trust decision. Consequently, this CP requires that the nonRepudiation bit be cleared, although it may be set in the case of dual key pair signature Certificates issued through Managed PKI Key Manager" Added: "Note: The nonRepudiation bit is not required to be set in these Certificates because the PKI industry has not yet reached a consensus as to what the nonRepudiation bit means. Until such a consensus emerges, the nonRepudiation bit might not be meaningful for potential Relying Parties. Moreover, the most commonly used applications do not always respect the nonRepudiation bit. Therefore, setting the bit might not help Relying Parties make a trust decision. Consequently, this CPS does not require that the nonRepudiation bit be set. It may be set in the case of dual key pair signature Certificates issued through Managed PKI Key Manager, or as otherwise requested. Any dispute relating to non-repudiation arising from the use of a digital certificate is a matter solely between the Subscriber and the Relying Party(s). VeriSign shall incur no liability in relation thereto." Added footnote: "The non Non repudiation bit may also be referred to as ContentCommitment in Digital Certificates in accordance with the X.509 standard. "
Section 9.13.2	Updated Jurisdiction from Santa Clara County, California to Fairfax County, Virginia
Section 9.14	Updated Governing Law from State of California to Commonwealth of Virginia

History of changes: version 2.5

Section 6.2.5	Deleted: "When VeriSign CA key pairs reach the end of their validity period, such CA key pairs will be archived for a period of at least 5 years. Archived CA key pairs will be securely stored using hardware cryptographic modules that meet the requirements of this CPS. Procedural controls prevent archived CA key pairs from being returned to production use. Upon the end of the archive period, archived CA private keys will be securely destroyed in accordance with this CPS." Added: "Upon expiration of a VeriSign CA Certificate, the key pair associated with the certificate will be securely retained for a period of at least 5 years using hardware cryptographic modules that meet the requirements of this CPS. These CA key pairs shall not be used for any signing events after their expiration date, unless the CA Certificate has been renewed in terms of this CPS."
Section 6.2.10	Deleted: "Upon termination of the operations of a Processing Center's CA, or a CA within its Subdomain, or the loss, theft, modification, unauthorized disclosure, or unauthorized use of such private key, Processing Center personnel shall decommission the CA's private key by deleting it using functionality of the token containing such CA's private key so as to prevent its recovery following deletion, while not adversely affecting the private keys of other CAs contained on the token. This process shall be witnessed in accordance with the standards documented in the VTN's confidential security policies." Added: "Where required, CA private keys are destroyed in a manner that reasonably ensures that there are no residuals remains of the key that could lead to the reconstruction of the key. Processing Center personnel decommission the CA's private key by deleting it using functionality of the token containing such CA's private key so as to prevent its recovery following deletion, while not adversely affecting the private keys of other CAs contained on the token. W This process shall be witnessed in accordance with the standards documented in the VTN's confidential security policies."
Section 6.3.2	Added: "End user Subscriber Certificates that are renewals of existing subscriber certificates may have a longer validity period (up to 3 months)."
Section 6.3.2 – table 4	Updated "Online CA to End-Entity Organizational Subscriber" to reflect a validity "Normally up to 3 years".

Section 7.1.4	Clarification added that an OU pointing to a Relying party Agreement in the Subject name is optional as long as the Relying Party Agreement is linked to from the Policyextension.
Section 9.8	Updated Liability Caps for Netsure to \$50,000 US to \$250,000 US. From \$1,000 US to \$1,000,000.00 US
Definitions	"NetSure Protection Plan": Updated definition with correct CPS Section reference.

History of changes: version 2.4

Section 1	Added Footnote: "Authenticated Content Signing Certificates (ACS) are issued by a non-VTN CA. However, reference is made to these certificates in certain sections of this VeriSign CPS, for ACS customers to understand certain procedural differences used for these certificates."
Section 1.2.	Added: "VeriSign Trust Network Shared Service Provider for non federal entities Policy: id-vtn-ssp OBJECT IDENTIFIER ::= {id-vtn id-vtn-ssp(7)} (2.16.840.1.113733.1.7.23.7)"
Section 3.2.3 Table 3	Added Verification requirements for Shared Service Provider Certificates for non federal entities: "The identity of the Certificate Subscriber is verified in accordance with the requirements of this CP and any additional requirements of the X.509 Certificate Policy for the US Department of Homeland Security Public Key Infrastructure (PKI)"
Section 4.9.7	Deleted: "CRLs for CA Certificates shall be issued at least quarterly" Added: "CRLs for CA Certificates shall be issued at least annually"
Section 6.3.2	Added: "Certificates issued to individual Subscribers of VeriSign's Shared Service Provider Certificates for non federal entities may have a 3-year validity."
Section 7.1.2.1	Updated to specify that: "The criticality field of the KeyUsage extension is generally set to TRUE for CA certificates and may be set to either TRUE, or FALSE for end entity Subscriber certificates."
Section 7.1.2.1- Table 6	Updated CA Criticality from "False" to "True"
Section 8.4	Deleted reference to the Affiliate Audit Program Guide
Section 9.3.3	Deleted "...and shall comply with all applicable privacy laws"
Definitions	Deleted "Affiliate Audit Program Guide"

History of changes: Version 2.3

Section 1	Added: "This CP conforms to the Internet Engineering Task Force (IETF) RFC 3647 for Certificate Policy and Certification Practice Statement construction."
Section 1.2	Added: "The Class 3 EV Certificate Policy: VeriSign/pki/vtn-cp/Class3/Enhanced validation (2.16.840.1.113733.1.7.23.6)" Added fn: "Certain certificates issued under the VTN may contain legacy policy OIDS assigned under the VTN"
Section 1.3.1	Added: "Before a subordinate CA can issue VTN Extended Validation Certificates in terms of the Guidelines for Extended Validation Certificates ("Guidelines"), it shall have to meet the requirements of the guidelines."
Section 1.4.1.2 – Table 2	Added: "Class 3 EV Certificates"
Section 1.4.1.3	Added: " High assurance with extended validation certificates are Class 3 certificates issued by VeriSign in conformance with the Guidelines for Extended Validation Certificates. "
Section 2.2	Added: "Any exception to this shall be approved by the PMA on a case by case basis and must be documented in the appropriate CPS."
Section 3.1.1	Added: "EV SSL certificate content and profile requirements shall comply with the requirements of the EV guidelines. "
Section 3.2.2	Added: "Validation procedures for issuing Extended Validation SSL Certificates shall be documented in a VTN participant's CPS and comply with the Extended Validation Guidelines."
Section 3.2.6	Added a footnote: "Customers of VeriSign's Certificate Interoperability Service (CIS) are encouraged, but not required, to have their own CPS under the Certificate Interoperability Service (CIS) CP Supplement, but in all cases must comply with VeriSign's Certificate Interoperability Service (CIS) CP Supplement, published in the VeriSign Repository"
Section 4.9.7	Added: "Any deviation from this general policy must get approval from the PMA and be published in the appropriate CPS."
Section 6.3.2	Deleted: "Certificates issued by CAs to end-user Class 3 Organization Subscribers may have Operational Periods longer than two years, up to five years, as long as the certificate content is reauthenticated by the CA or RA at least every 25-months." Added: "Any exception to this procedure requires approval from the PMA and must be documented in the relevant CPS."
Section 7.1.3	Added "Certain versions of Processing Center support the use of Sha256, Sha384 and Sha512 encryption algorithms in end-entity Subscriber Certificates."
Section 7.1.6	Added fn: "Certain certificates issued under the VTN may contain legacy policy OIDS assigned under the

	VTN”
Section 7.1.8	Deleted: “All X.509 Version 3 VTN Certificates include a policy qualifier within their Certificate Policies extensions. Specifically, such Certificates shall contain a CPS pointer qualifier populated with a URL pointing to the applicable Relying Party Agreement.” Added: “X.509 Version 3 VTN Certificates contain a policy qualifier within the Certificate Policies extension. Generally, such Certificates contain a CPS pointer qualifier that points to the applicable Relying Party Agreement or the applicable CPS. In addition, some Certificates contain a User Notice Qualifier which points to the applicable Relying Party Agreement.”
Definitions	Added definitions for Extended validation Certificates

History of changes: Version 2.2 (Effective date August 15, 2006)

Section 1.4.1.2 (Table 2)	Added TLS as an appropriate use for organization certificates.
Section 8	Deleted “CAs and RAs undergo a periodic compliance audit”. Added “Symantec and Affiliates undergo a periodic compliance audit”
Section 8.2’	Deleted: “A third party auditing firm shall perform the Compliance Audits of STN participants approving one hundred (100) or more Class 3 Certificate Applications within a twelve (12) month period. Compliance audits of entities approving Class 1 or 2 Certificate Applications or fewer than one hundred (100) Class 3 Certificate Applications may be self-audits.” Added: “A third party auditing firm shall perform the Compliance Audits of Symantec and Affiliates.”
Section 8.4 - Self-Audits of RAs (Class 1-2)	Deleted: An audit program guide describes the procedures for auditing enterprise customers that approve Class 1 and 2 Certificate Applications Such enterprise customers shall meet their annual Compliance Audit requirement via a self-audit attesting to the satisfaction of the control objectives in the audit program guide and noting any exceptions or irregularities to STN policies and the steps taken to remedy the irregularities.” Added: “It is recommended that Enterprise customers approving Class 1 and 2 certificates undergo an annual compliance audit. Upon request from Symantec and/or a Superior Entity (if the Superior Entity is not Symantec), Enterprise customers shall undergo an audit noting any exceptions or irregularities to STN policies and the steps taken to remedy the irregularities.”
Section 8.4 - Audit of an RA (Class 3):	Deleted: “An audit program guide describes the procedures for auditing enterprise customers that approve Class 3 Certificate Applications. If such RA Customers approve one hundred (100) or more Class 3 Certificate Applications within a twelve (12) month period, such Customers shall meet their annual Compliance Audit requirement via an audit by a third-party auditing firm attesting to the satisfaction of the control objectives in the audit program guide and noting any exceptions or irregularities. If not, such RA Customers shall meet their annual Compliance Audit requirement via a self-audit attesting to the satisfaction of the control objectives in the audit program guide and noting any exceptions or irregularities. Added: “It is recommended that Enterprise Customers authorizing the issuance of Class 3 SSL certificates undergo an annual compliance audit of their obligations under the VTN. ²⁴ Upon request from VeriSign and/or a Superior Entity (if the Superior Entity is not VeriSign) Enterprise Customers shall undergo an audit noting any exceptions or irregularities to VTN policies and the steps taken to remedy the irregularities.”
Section 9.2.3	Updated Section header from, “Insurance or Warranty Coverage for End-Entities” to “extended Warranty Coverage “
Section 9.2.3	Deleted: “The NetSure Protection Plan is an extended warranty program that applies within VeriSign’s Subdomain of the VTN and the Subdomains of participating Affiliates. Where it applies, the NetSure Protection Plan provides Subscribers receiving Retail Certificates with protection against accidental occurrences such as theft, corruption, loss, or unintentional disclosure of the Subscriber’s private key (corresponding to the public key in the Certificate), as well as impersonation and certain loss of use of the Subscriber’s Certificate. The NetSure Protection Plan also provides protection to Relying Parties when they rely on Certificates covered by the NetSure Protection Plan. NetSure is a program provided by VeriSign and backed by insurance obtained from commercial carriers. For general information concerning the NetSure Protection Plan, and a discussion of which Certificates are covered by it, see http://www.verisign.com/netsure . The protections of the NetSure Protection Plan are also offered, for a fee, to Enterprise RA Customers of VeriSign. They can obtain protections under the NetSure Protection Plan subject to the terms of an appropriate agreement for this service. This service not only extends the protections of the NetSure Protection Plan to the Subscribers whose Certificate Applications are approved by the enterprise customer, it also extends these protections to enterprise customer itself.” Added: “Some VTN participants offer extended warranty programs that provides SSL and code signing certificate subscribers with protection against loss or damage that is due to a defect

²⁴ VeriSign and/or Affiliates perform all identification and authentication of Class 3 SSL certificates authorized for issuance by the Enterprise Customers.

	in the participant's issuance of the certificate or other malfeasance caused by participant's negligence or breach of its contractual obligations, provided that the subscriber of the certificate has fulfilled its obligations under the applicable service agreement. VTN participants offering extended warranty programs are required to include program information in their CPS."
Section 9.3.3	Added: "VTN participants receiving private information shall secure it from compromise and disclosure to third parties and shall comply with all applicable privacy laws."

History of changes included in version 2.1

- Section 4.5.2 Updated to include the following language: "Relying Party is solely responsible to investigate whether reliance on a digital signature performed by an end-user Subscriber Certificate prior to revocation of a Certificate in the Certificate chain is reasonable. Any such reliance is made solely at the risk of the Relying party."
- Section 4.12.1 Made the list of requirements for key recovery a VeriSign recommendation